


List 1250

EX-GOLD LS-NC-LDS, Long Shank, 90° Spot Drills

SPEED FEED 354	HSS	BR	2 FLUTE	STUB	20°	PACKED 1 PIECE
--------------------------	------------	-----------	----------------	-------------	------------	--------------------------

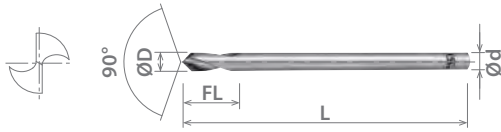

EDP Number		Diameter (D)					Flute Length	Overall Length	Shank Diameter
		Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm)
63503	●	-	-	-	3.000	0.11811	11.00	75.00	3.00
63504	●	-	-	-	4.000	0.15748	15.00	100.00	4.00
63506	●	-	-	-	6.000	0.23622	20.00	150.00	6.00
63508	●	-	-	-	8.000	0.31496	26.00	150.00	8.00
63510	●	-	-	-	10.000	0.39370	30.00	200.00	10.00
63512	●	-	-	-	12.000	0.47244	36.00	200.00	12.00
63516	●	-	-	-	16.000	0.62992	41.00	250.00	16.00
63518	●	-	-	-	20.000	0.78740	53.00	250.00	20.00
63520	●	-	-	-	25.000	0.98425	60.00	250.00	25.00

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked
Note: Other coatings are available upon request.



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H					
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel					
Carbon Steel			Alloy Steel	Die Steel	300	400	17-4 PH		Aluminum		Nickel Alloy	Titanium						
Low	Medium	High							6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340														
1018	1045																	

○ Good ● Best

