




List 13158

HY-PRO® SYNCHRO AL US-AL-SFT

SPIRAL FLUTE	HSSE	V	2 FLUTE	C/2.5P	45°	PACKED 1 PIECE
--------------	------	---	---------	--------	-----	-------------------

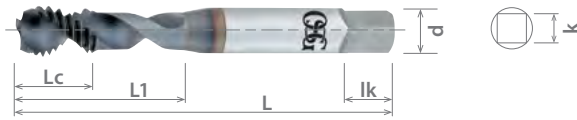

EDP Number	Thread Size	Overall Length	Thread Length	Neck Length	Shank Diameter	Square Width	Square Length
		L (mm)	Lc (mm)	L1 (mm)	d (mm)	k (mm)	lk (mm)
1315800108	M3 x 0.5	49.20	4.10	16.00	3.58	2.79	4.76
1315800208	M4 x 0.7	54.00	5.60	19.10	4.27	3.33	6.35
1315800308	M5 x 0.8	60.30	6.40	22.20	4.93	3.86	6.35
1315800408	M6 x 1	63.50	8.00	25.40	6.48	4.85	7.94
1315800508	M8 x 1.25	69.10	10.00	28.60	8.08	6.05	9.53
1315800608	M10 x 1.25	74.60	12.00	31.80	9.68	7.26	11.11
1315800708	M10 x 1.5	74.60	12.00	31.80	9.68	7.26	11.11
1315800808	M12 x 1.5	85.70	14.00	49.10	9.32	6.99	11.11
1315800908	M12 x 1.75	85.70	14.00	49.10	9.32	6.99	11.11

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium							
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH		⊙	⊙						
1018	1045								300-800 SFM	200-700 SFM						

○ Good ⊙ Best

