




List 13159

HY-PRO® SYNCHRO AL US-AL-RFT, Synchronized, RHC/LHS for Through Holes

SPIRAL FLUTE	HSSE	V	2 FLUTE	C/6P	20°	LH	PACKED 1 PIECE
--------------	------	---	---------	------	-----	----	-------------------

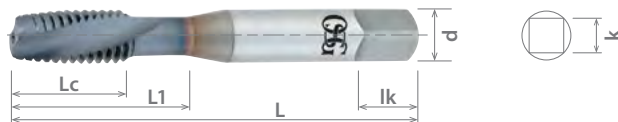

EDP Number	Thread Size	Overall Length	Thread Length	Neck Length	Shank Diameter	Square Width	Square Length
		L (mm)	Lc (mm)	L1 (mm)	d (mm)	k (mm)	lk (mm)
1315900108	M3 x 0.5	49.20	6.10	16.00	3.58	2.79	4.76
1315900208	M4 x 0.7	53.80	8.40	19.10	4.27	3.33	6.35
1315900308	M5 x 0.8	60.10	9.60	22.20	4.93	3.86	6.35
1315900408	M6 x 1	62.50	12.00	25.40	6.48	4.85	7.94
1315900508	M8 x 1.25	69.10	15.00	28.60	8.08	6.05	9.53
1315900608	M10 x 1.25	74.60	18.00	31.80	9.68	7.26	11.11
1315900708	M10 x 1.5	74.60	18.00	31.80	9.68	7.26	11.11
1315900808	M12 x 1.5	85.70	21.00	49.10	9.32	6.99	11.11
1315900908	M12 x 1.75	85.70	21.00	49.10	9.32	6.99	11.11

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H					
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel					
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium						
Low	Medium	High			300	400	17-4 PH	6061	Casting	Inconel			6Al4V	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1010	1035	1065	4140	4340														
1018	1045								⊙	⊙								
									300-800 SFM	200-700 SFM								

○ Good ⊙ Best

