




List 14153

EXOCARB® OTC-NRT, JIS, Carbide Inlaid, DIN/DIN

FORMING	CARBIDE	BR	C/1.5P	PACKED 1 PIECE
---------	---------	----	--------	-------------------

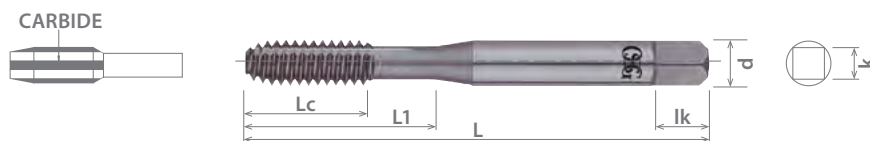

EDP Number	Thread Size	Thread Limit	Overall Length	Thread Length	Neck Length	Shank Diameter	Square Width	Square Length	Tap Drill Size		
			L (mm)	Lc (mm)	L1 (mm)	d (mm)	k (mm)	lk (mm)	Min (mm)	Max (mm)	
1415310100	●	M6 x 1	RH7	80.00	12.00	30.00	6.00	4.90	8.00	5.49	5.59
1415310200	●	M8 x 1.25	RH7	90.00	15.00	35.00	8.00	6.20	9.00	7.36	7.49
1415310300	●	M10 x 1.25	RH7	100.00	18.00	39.00	10.00	8.00	11.00	9.36	9.49
1415310400	●	M10 x 1.5	RH7	100.00	18.00	39.00	10.00	8.00	11.00	9.24	9.39

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked
Note: See page 784 for tap drill recommendations.



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium							
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH		○	○						
1018	1045								○	○						
									65-150 SFM	50-120 SFM						

○ Good ○ Best

