




List 2043

EXOCARB® AERO BLIZZARD®, Reduced Neck

SPEED FEED 1381	CARBIDE	BR	3 FLUTE	45°				SHANK h6	STUB	PACKED 1 PIECE
---------------------------	----------------	-----------	----------------	------------	--	--	--	--------------------	-------------	--------------------------

Cutting Diameter Tolerance	
1/4" ≤ D ≤ 1"	+0 / -0.002"

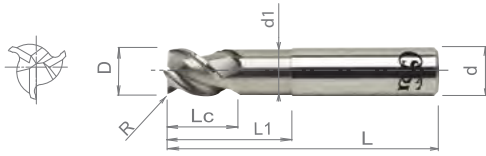

EDP Number	Diameter	Corner Radius	Length of Cut	Neck Length	Neck Diameter	Overall Length	Shank Diameter
20430100	1/4	-	0.250	1.125	0.246	2.500	0.250
20430200	1/4	0.020	0.250	1.125	0.246	2.500	0.250
20430300	1/4	0.030	0.250	1.125	0.246	2.500	0.250
20430400	1/4	0.060	0.250	1.125	0.246	2.500	0.250
20430500	1/2	-	0.500	1.375	0.496	3.000	0.500
20430600	1/2	0.020	0.500	1.375	0.496	3.000	0.500
20430700	1/2	0.030	0.500	1.375	0.496	3.000	0.500
20430800	1/2	0.060	0.500	1.375	0.496	3.000	0.500
20430900	5/8	-	0.625	1.625	0.621	3.500	0.625
20431000	5/8	0.030	0.625	1.625	0.621	3.500	0.625
20431100	5/8	0.060	0.625	1.625	0.621	3.500	0.625
20431200	5/8	0.090	0.625	1.625	0.621	3.500	0.625
20431300	3/4	-	0.750	2.000	0.746	4.000	0.750
20431400	3/4	0.060	0.750	2.000	0.746	4.000	0.750
20431500	3/4	0.090	0.750	2.000	0.746	4.000	0.750
20431600	3/4	0.120	0.750	2.000	0.746	4.000	0.750
20431700	1	-	1.000	2.625	0.992	5.000	1.000
20431800	1	0.060	1.000	2.625	0.992	5.000	1.000
20431900	1	0.090	1.000	2.625	0.992	5.000	1.000
20432000	1	0.120	1.000	2.625	0.992	5.000	1.000

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked
 Note: DLC coating available upon request.



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium	Hardened Steel						
Low	Medium	High			6061	Casting				6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
1010	1035	1065	4140	4340	300	400	17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1018	1045							○	○							

○ Good ○ Best

