



# EXOCARB® AERO UVX-Ti

Variable Lead End Mill for Titanium Alloy

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS


INDEX

## List 2102

EXOCARB® AERO UVX-TI-LN-5FL, Reduced Neck

<b>SPEED FEED</b> 1374	<b>CARBIDE</b>	<b>EXO</b>	<b>5 FLUTE</b>	<b>41-43°</b>			<b>SHANK</b> h6	<b>REG</b>	<b>PACKED</b> 1 PIECE
---------------------------	----------------	------------	----------------	---------------	--	--	--------------------	------------	--------------------------

Cutting Diameter Tolerance	
1/2" ≤ D ≤ 1-1/4"	+0 / -0.002"

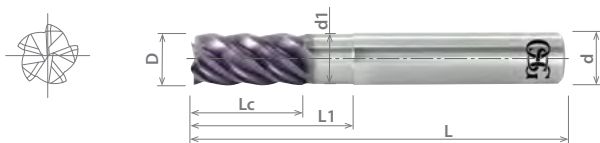

EDP Number		Diameter	Length of Cut	Neck Length	Neck Diameter	Overall Length	Shank Diameter
		D (Fractional Size)	Lc (Inch)	L1 (Inch)	d1 (Inch)	L (Inch)	d (Inch)
21020011	●	1/2	1.000	1.500	0.480	3.500	0.500
21020111	●	5/8	1.250	1.875	0.605	4.000	0.625
21020211	●	3/4	1.500	2.250	0.730	6.500	0.750
21020311	●	1	2.000	3.000	0.980	5.500	1.000
21020411	●	1-1/4	2.500	3.750	1.230	6.000	1.250

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium	Hardened Steel							
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1010	1035	1065	4140	4340	300	400	17-4 PH					○					
1018	1045				○	○	○					○					

○ Good ○ Best

