




List 233

OSG CARBIDE THREE FLUTE DRILL

SPEED FEED 338-340	CARBIDE	BR	3 FLUTE	JOBBER	30°	PACKED 1 PIECE
------------------------------	----------------	-----------	----------------	---------------	------------	--------------------------

Cutting Diameter Tolerance		
Size	mm	inch
3.00≤D≤19.05	+0 / -0.013	+0 / -0.0005

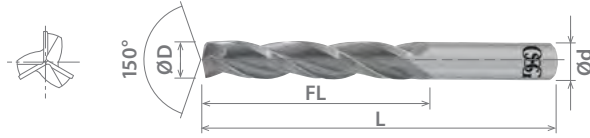

EDP Number		Diameter (D)					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter	
		Fractional Size	Wire Gage	Letter Size	mm	Inch			d (in)	d (mm)
233-1181	●	-	-	-	3.000	0.11811	31.75	57.15	-	3.00
233-1250	●	1/8	-	-	3.175	0.12500	31.75	57.15	0.125	-
233-1406	●	9/64	-	-	3.572	0.14063	34.93	63.50	0.141	-
233-1562	●	5/32	-	-	3.969	0.15625	34.93	63.50	0.156	-
233-1719	●	11/64	-	-	4.366	0.17188	41.28	69.85	0.172	-
233-1875	●	3/16	-	-	4.763	0.18750	41.28	69.85	0.188	-
233-2031	●	13/64	-	-	5.159	0.20313	44.45	76.20	0.203	-
233-2188	●	7/32	-	-	5.556	0.21875	44.45	76.20	0.219	-
233-2344	●	15/64	-	-	5.953	0.23438	50.80	82.55	0.234	-
233-2362	●	-	-	-	6.000	0.23622	50.80	82.55	-	6.00
233-2500	●	1/4	-	E	6.350	0.25000	50.80	82.55	0.250	-
233-2656	●	17/64	-	-	6.747	0.26563	53.98	88.90	0.266	-
233-2812	●	9/32	-	-	7.144	0.28125	53.98	88.90	0.281	-
233-2969	●	19/64	-	-	7.541	0.29688	60.33	95.25	0.297	-
233-3125	●	5/16	-	-	7.938	0.31250	60.33	95.25	0.313	-
233-3150	●	-	-	-	8.000	0.31496	60.33	95.25	-	8.00
233-3281	●	21/64	-	-	8.334	0.32813	63.50	101.60	0.656	-
233-3438	●	11/32	-	-	8.733	0.34375	63.50	101.60	0.344	-
233-3594	●	23/64	-	-	9.128	0.35938	63.50	101.60	0.359	-
233-3750	●	3/8	-	-	9.525	0.37500	69.85	107.95	0.375	-
233-3906	●	25/64	-	-	9.922	0.39063	73.03	114.30	0.391	-
233-3937	●	-	-	-	10.000	0.39370	73.03	114.30	-	10.00
233-4062	●	13/32	-	-	10.319	0.40625	73.03	114.30	0.406	-
233-4219	●	27/64	-	-	10.716	0.42188	73.03	114.30	0.422	-
233-4375	●	7/16	-	-	11.113	0.43750	73.03	114.30	0.438	-
233-4531	●	29/64	-	-	11.509	0.45313	76.20	120.65	0.453	-
233-4688	●	15/32	-	-	11.906	0.46875	76.20	120.65	0.469	-
233-4724	●	-	-	-	12.000	0.47244	76.20	120.65	-	12.00
233-4844	●	31/64	-	-	12.303	0.48438	76.20	120.65	0.484	-
233-5000	●	1/2	-	-	12.700	0.50000	76.20	120.65	0.500	-
233-5312	●	17/32	-	-	13.494	0.53125	76.20	120.65	0.531	-
233-5512	●	-	-	-	14.000	0.55118	88.90	146.05	-	14.00
233-5625	●	9/16	-	-	14.288	0.56250	88.90	146.05	0.563	-
233-6250	●	5/8	-	-	15.875	0.62500	88.90	146.05	0.625	-
233-6299	●	-	-	-	16.000	0.62992	88.90	146.05	-	16.00
233-7500	●	3/4	-	-	19.050	0.75000	107.95	146.05	0.750	-

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked
 Note: Other coatings are available upon request.



P					M			K	N		S		H					
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel					
Carbon Steel			Alloy Steel	Die Steel	300	400	17-4 PH		Aluminum		Nickel Alloy	Titanium						
Low	Medium	High							6061	7075			Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1010	1035	1065	4140	4340														
1018	1045																	

○ Good ○ Best

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

