




## List 328

EXOTAP-MOLD® NPT/ANPT

STRAIGHT FLUTE	HSS-Co	BR	0°	PACKED 1 PIECE
----------------	--------	----	----	-------------------

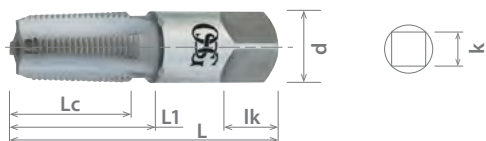

EDP	Thread Size	Overall Length	Thread Length	Neck Length	Shank Diameter	Square Width	Square Length	Number of Flutes
		L (Inch)	Lc (Inch)	L1 (Inch)	d (Inch)	k (Inch)	lk (Inch)	
1736000	● 1/8 - 27 NPT, ANPT	2.126	0.751	0.992	0.438	0.328	0.375	4
1736100	● 1/4 - 18 NPT, ANPT	2.437	1.062	1.318	0.563	0.421	0.438	4
1736200	● 3/8 - 18 NPT, ANPT	2.563	1.062	1.318	0.700	0.531	0.500	4
1736300	● 1/2 - 14 NPT, ANPT	3.126	1.374	-	0.688	0.515	0.625	4
1736400	● 3/4 - 14 NPT, ANPT	3.252	1.374	-	0.906	0.679	0.688	5

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked  
 Note: Other coatings are available upon request.

EXT

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium	Hardened Steel						
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH						○	○		
1018	1045				○	○	○						○	○		
○	○	○	○	○	○	○	○						○	○		
15-40 SFM	10-25 SFM	10-20 SFM	10-25 SFM	10-15 SFM	10-25 SFM	10-25 SFM	8-12 SFM						10-20 SFM	8-12 SFM		

○ Good ○ Best

