




List 41300

EXOCARB® WH-VM-PNC, Miniature

THREAD MILL	SPEED FEED 793	CARBIDE	SS	WXS	3 FLUTE	11°	SHANK h6	PACKED 1 PIECE
-------------	-------------------	---------	----	-----	---------	-----	-------------	-------------------

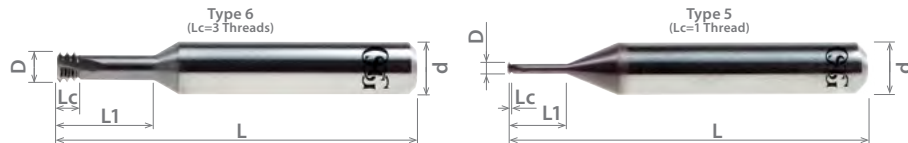

EDP Number	●	Thread Size	Diameter		Overall Length		Length of Cut		Neck Length		Shank Diameter		Type	Surface Treatment
			D (mm)	L (mm)	Lc (mm)	L1 (mm)	d (mm)	d (mm)						
3900495	●	M1 x 0.25	0.72	40.00	0.26	2.75	3.00	5	Super Smooth					
3900496	●	M1.2 x 0.25	0.91	40.00	0.26	3.25	3.00	5	Super Smooth					
3900497	●	M1.4 x 0.3	1.05	40.00	0.31	3.80	3.00	5	Super Smooth					
3900498	●	M1.6 x 0.35	1.20	40.00	0.36	4.35	3.00	5	Super Smooth					
3900499	●	M1.7 x 0.35	1.30	40.00	0.36	4.85	3.00	5	Super Smooth					
3900500	●	M2 x 0.4	1.50	40.00	1.20	4.40	6.00	6	WXS					
3900501	●	M2.5 x 0.45	1.90	41.00	1.35	5.60	6.00	6	WXS					
3900502	●	M3 x 0.5	2.40	41.00	1.50	6.50	6.00	6	WXS					
3900503	●	M4 x 0.7	3.10	41.00	2.10	8.70	6.00	6	WXS					
3900504	●	M5 x 0.8	4.00	41.00	2.40	10.80	6.00	6	WXS					

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

Note: For internal threads only.



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

For more information on thread mill applications, including ThreadPro software, visit: osgtool.com/ThreadPro.



P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium				
Low	Medium	High							6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH		6061	7075		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
○	○	○	○	○	⊗	⊗	⊗	○	⊗	⊗	⊗	⊗	⊗	⊗	⊗	○

○ Good ⊗ Best

