




List 444

OSG STANDARD CARBIDE DOUBLE END SQ

SPEED FEED 1406-1407	CARBIDE	BR	TiAIN	4 FLUTE	30°			WELDON FLAT	STUB	REG	PACKED 1 PIECE
-------------------------	---------	----	-------	---------	-----	--	--	-------------	------	-----	-------------------

Cutting Diameter Tolerance	
1/8" ≤ D ≤ 1/2"	+0 / -0.002"

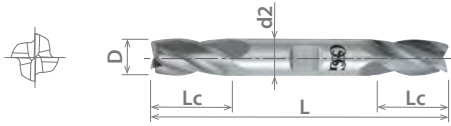

EDP Number	Diameter	Length of Cut	Overall Length	Shank Diameter	Surface Treatment	
						D (Fractional Size)
444-1250	●	1/8	0.375	3.063	0.375	BRIGHT
444-125011	●	1/8	0.375	3.063	0.375	TiAIN
444-1562	●	5/32	0.438	3.125	0.375	BRIGHT
444-1875	●	3/16	0.500	3.250	0.375	BRIGHT
444-187511	●	3/16	0.500	3.250	0.375	TiAIN
444-2188	●	7/32	0.563	3.375	0.375	BRIGHT
444-2500	●	1/4	0.625	3.375	0.375	BRIGHT
444-250011	●	1/4	0.625	3.375	0.375	TiAIN
444-2812	●	9/32	0.688	3.375	0.375	BRIGHT
444-3125	●	5/16	0.750	3.500	0.375	BRIGHT
444-3438	●	11/32	0.750	3.500	0.375	BRIGHT
444-3750	●	3/8	0.750	3.500	0.375	BRIGHT
444-375011	●	3/8	0.750	3.500	0.375	TiAIN
444-4375	●	7/16	0.875	4.000	0.500	BRIGHT
444-5000	●	1/2	1.000	4.000	0.500	BRIGHT

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel	300	400	17-4 PH		Aluminum		Nickel Alloy	Titanium	Hardened Steel				
Low	Medium	High							6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1010	1035	1045	1065	4140				4340	300	400	17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC
○	○	○	○	○	○	○		○	○	○			○	○	○	○	

○ Good ⊗ Best

