



List 4470

EXOCARB® WXS-CRE, High Feed



SPEED FEED 1442

CARBIDE WXS

0°




SHANK h6

STUB

PACKED 1 PIECE

Cutting Diameter Tolerance	
1/8" ≤ D ≤ 3/16"	+0 / -0.0008"
1/4" ≤ D ≤ 1/2"	+0 / -0.0012"

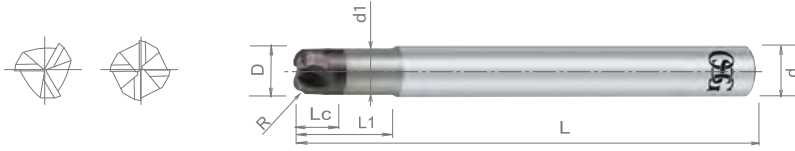

EDP Number		Diameter		Corner Radius	Length of Cut		Neck Length	Neck Diameter	Overall Length	Shank Diameter	Number of Flutes
		D (Fractional Size)	R (Inch)	Lc (Inch)	L1 (Inch)	d1 (Inch)	L (Inch)	d (Inch)			
44700111	●	1/8	0.031	0.063	0.375	0.120	2.250	0.250	0.250	3	
44700211	●	3/16	0.063	0.094	0.563	0.180	2.250	0.250	0.250	3	
44700311	●	1/4	0.063	0.100	1.000	0.230	3.000	0.250	0.250	4	
44700411	●	5/16	0.094	0.130	1.250	0.290	3.000	0.313	0.313	4	
44700511	●	3/8	0.094	0.150	1.500	0.340	4.000	0.375	0.375	4	
44700611	●	1/2	0.125	0.200	2.000	0.460	5.000	0.500	0.500	4	

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium	Hardened Steel						
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH						○	○	○	○
○	○	○	○	○	○	○	○	○					○	○	○	○

○ Good ○ Best

