



List 4471

EXOCARB® WXS-PKE, Reduced Neck



SPEED FEED
1440

CARBIDE

WXS

4 FLUTE

45°




SHANK
h6

STUB

PACKED
1 PIECE

Cutting Diameter Tolerance	
1/16" ≤ D ≤ 1/2"	+0 / -0.0008"

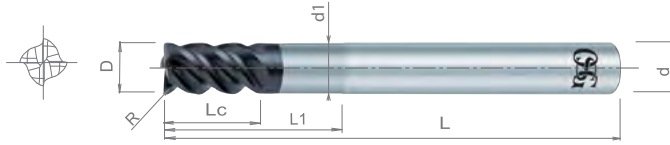

EDP Number	Diameter	Corner Radius	Length of Cut	Neck Length	Neck Diameter	Overall Length	Shank Diameter	
								D (Fractional Size)
447100111	●	1/16	0.010	0.063	0.250	0.058	2.250	0.125
447100311	●	3/32	0.010	0.094	0.375	0.089	2.250	0.125
447100511	●	1/8	0.010	0.125	0.500	0.120	2.250	0.125
447100611	●	1/8	0.015	0.125	0.500	0.120	2.250	0.125
447100711	●	1/8	0.020	0.125	0.500	0.120	2.250	0.125
447101011	●	3/16	0.020	0.188	0.500	0.181	2.250	0.188
447101111	●	3/16	0.030	0.188	0.500	0.181	2.250	0.188
447101411	●	1/4	0.010	0.250	0.750	0.242	2.500	0.250
447101511	●	1/4	0.020	0.250	0.750	0.242	2.500	0.250
447101611	●	1/4	0.030	0.250	0.750	0.242	2.500	0.250
447102011	●	3/8	0.020	0.375	1.000	0.367	3.000	0.375
447102111	●	3/8	0.030	0.375	1.000	0.367	3.000	0.375
447102211	●	3/8	0.060	0.375	1.000	0.367	3.000	0.375
447102611	●	1/2	0.030	0.500	1.500	0.488	3.250	0.500
447102711	●	1/2	0.060	0.500	1.500	0.488	3.250	0.500

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



P					M			K	N		S		H							
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel							
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium											
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC				
1010	1035	1065	4140	4340	300	400	17-4 PH						○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○

○ Good ○ Best

