




List 4572

EXOCARB® WXS-CRE, High Feed



SPEED FEED 1445	CARBIDE	WXS	28°			SHANK h6	STUB	PACKED 1 PIECE
---------------------------	----------------	------------	------------	--	--	--------------------	-------------	--------------------------

Cutting Diameter Tolerance	
2mm ≤ D ≤ 4mm	+0 / -0.020mm
6mm ≤ D ≤ 12mm	+0 / -0.030mm

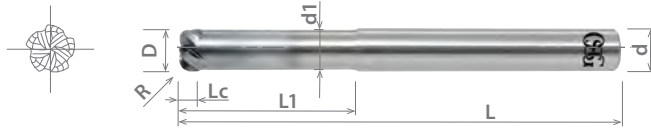

EDP Number	Diameter	Corner Radius	Length of Cut	Neck Length	Neck Diameter	Overall Length	Shank Diameter	Number of Flutes	
									D (mm)
48106421	●	2.00	0.50	0.80	8.00	2.00	50.00	6.00	4
48106433	●	3.00	0.75	1.20	12.00	2.70	55.00	6.00	5
48106445	●	4.00	1.00	1.60	12.00	3.60	55.00	6.00	5
48106467	●	6.00	1.50	2.50	12.00	5.40	90.00	6.00	5
48106489	●	8.00	2.00	3.50	16.00	7.20	100.00	8.00	5
48106509	●	10.00	2.00	4.00	20.00	9.00	100.00	10.00	5
48106533	●	12.00	3.00	5.00	24.00	11.00	110.00	12.00	5

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium				
Low	Medium	High							6061 7075				Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH		6061	Casting					~35 HRC	35-45 HRC
○	○	○	○	○	○	○		○			○	○	○	○	○	○

○ Good ○ Best

