




## List 52602

OSG PHOENIX<sup>®</sup> PRC ASF, Screw Fit Head



<b>SPEED FEED</b> 1536-1537	<b>INSERTS</b> 1254	<b>ACCS.</b> 1255	<b>STEEL</b>	<b>PACKED</b> 1 PIECE
--------------------------------	------------------------	----------------------	--------------	--------------------------

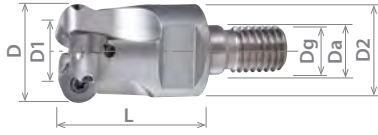


EDP Number	Designation	Diameter		Number of Flutes	Pilot Diameter	Thread Size	Flange Diameter	Overall Length	Spanner Wrench	Applicable Insert
		D (Inch)	D1 (Inch)		Da (Inch)	Dg (Inch)	D2 (Inch)	L (Inch)		
52602000	● PRC10R100ASF12-3	1.000	0.606	3	0.492	M12	0.905	1.378	17	RPH_10
52602001	● PRC10R125ASF16-4	1.250	0.856	4	0.669	M16	1.102	1.575	22	RPH_10
52602002	● PRC12R125ASF16-2	1.250	0.778	2	0.669	M16	1.102	1.575	22	RPH_12
52602003	● PRC12R150ASF16-3	1.500	1.028	3	0.669	M16	1.102	1.575	22	RPH_12
52602004	● PRC16R150ASF16-2	1.500	0.870	2	0.669	M16	1.102	1.575	22	RPH_16

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



## DESIGNATION EXPLANATION

**PRC 10 R 100 ASF 12-3**



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

