



List 52603

OSG PHOENIX[®] PHC ASF



SPEED FEED
1534-1535


INSERTS
1246

ACCS.
1247

STEEL



PACKED
1 PIECE

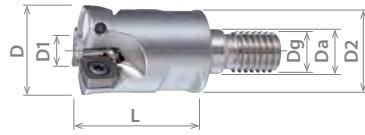

EDP Number	Designation	Diameter		Number of Flutes	Pilot Diameter		Thread Size		Overall Length		Spanner Wrench	Applicable Insert
		D (Inch)	D1 (Inch)		Da (Inch)	Dg (mm)	D2 (Inch)	L (Inch)				
52603004	● PHC07R063ASF8-2	0.625	0.286	2	0.334	M8	0.571	1.063	10	SPMT07		
52603005	● PHC07R075ASF10-3	0.750	0.411	3	0.413	M10	0.709	1.300	14	SPMT07		
52603000	● PHC09R100ASF12-2	1.000	0.535	2	0.492	M12	0.905	1.378	17	SDMT09		
52603006	● PHC07R100ASF12-4	1.000	0.661	4	0.492	M12	0.905	1.378	17	SPMT07		
52603001	● PHC09R125ASF16-3	1.250	0.785	3	0.669	M16	1.102	1.575	22	SDMT09		
52603002	● PHC12R125ASF16-2	1.250	0.596	2	0.669	M16	1.102	1.575	22	SXMT12		
52603007	● PHC07R125ASF16-5	1.250	0.911	5	0.669	M16	1.102	1.575	22	SPMT07		
52603003	● PHC12R150ASF16-3	1.500	0.846	3	0.669	M16	1.102	1.575	22	SXMT12		

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

DESIGNATION EXPLANATION

PHC 07 R 063 ASF 8-3



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○		○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

