



List 52605

OSG PHOENIX® PFR ASF, Screw Fit Head



SPEED FEED
1544-1545

INSERTS
1278-1283


ACCS.
1284

STEEL

CARBIDE

2 FLUTE

PACKED
1 PIECE

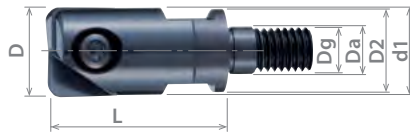

| EDP Number | Designation | Diameter | Neck Diameter | Pilot Diameter | Thread Size | Flange Diameter | Overall Length | Spanner Wrench | Applicable Insert |
|------------|----------------|----------|---------------|----------------|-------------|-----------------|----------------|----------------|-------------------|
| | | D (Inch) | d1 (Inch) | Da (Inch) | Dg (mm) | D2 (Inch) | L (Inch) | | |
| 52605000 | PFR-R0375ASF6 | 0.375 | 0.374 | 0.256 | M6 | 0.354 | 1.024 | 7 | PFR0375 |
| 52605001 | PFR-R0500ASF6 | 0.500 | 0.453 | 0.256 | M6 | 0.433 | 1.024 | 7 | PFR0500 |
| 52605002 | PFR-R0625ASF8 | 0.625 | 0.610 | 0.335 | M8 | 0.571 | 1.260 | 10 | PFR0625 |
| 52605003 | PFR-R0750ASF10 | 0.750 | 0.768 | 0.413 | M10 | 0.709 | 1.496 | 14 | PFR0750 |
| 52605004 | PFR-R1000ASF12 | 1.000 | 0.965 | 0.492 | M12 | 0.906 | 1.496 | 17 | PFR1000 |

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



DESIGNATION EXPLANATION

PFR-R 0375 ASF 6



See Full Detail on Page 1524

| P | M | K | N | S | H |
|-------|-----------------|-----------|-------------|------|----------------|
| Steel | Stainless Steel | Cast Iron | Non-Ferrous | HRSA | Hardened Steel |
| ○ | ○ | ○ | ○ | ○ | ○ |

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

