




## List 5275

EXOCARB® CAO-GDXL, 15D-30D

SPEED FEED 329	CARBIDE	BR	2 FLUTE	TAPER	30°	SHANK h6	PACKED 1 PIECE
-------------------	---------	----	---------	-------	-----	-------------	-------------------

Size	mm	inch
D=3	+0/-0.014	+0/-0.0006
3 < D ≤ 6	+0/-0.018	+0/-0.0007
6 < D ≤ 10	+0/-0.022	+0/-0.0009

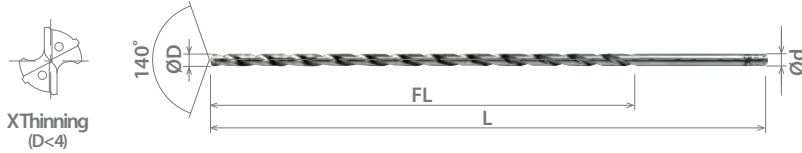

EDP Number		Diameter (D)					Drilling L/D Ratio	Flute Length	Overall Length	Shank Diameter
		Fractional Size	Wire Gage	Letter Size	mm	Inch		FL (mm)	L (mm)	d (mm)
8567130	●	-	-	-	3.000	0.11811	16	55.00	105.00	3.00
8567140	●	-	-	-	4.000	0.15748	17	75.00	125.00	4.00
8567340	●	-	-	-	4.000	0.15748	21	90.00	140.00	4.00
8567345	●	-	-	-	4.500	0.17717	22	110.00	165.00	5.00
8567150	●	-	-	-	5.000	0.19685	16	90.00	140.00	5.00
8567350	●	-	-	-	5.000	0.19685	21	115.00	165.00	5.00
8567450	●	-	-	-	5.000	0.19685	31	165.00	215.00	5.00
8567355	●	-	-	-	5.500	0.21654	23	140.00	190.00	6.00
8567455	●	-	-	-	5.500	0.21654	34	200.00	250.00	6.00
8567160	●	-	-	-	6.000	0.23622	16	110.00	160.00	6.00
8567360	●	-	-	-	6.000	0.23622	21	140.00	190.00	6.00
8567460	●	-	-	-	6.000	0.23622	31	200.00	250.00	6.00
8567165	●	-	-	-	6.500	0.25591	16	120.00	175.00	7.00
8567170	●	-	-	-	7.000	0.27559	16	125.00	175.00	7.00
8567370	●	-	-	-	7.000	0.27559	21	160.00	210.00	7.00
8567470	●	-	-	-	7.000	0.27559	31	230.00	280.00	7.00
8567180	●	-	-	-	8.000	0.31496	16	145.00	195.00	8.00
8567380	●	-	-	-	8.000	0.31496	21	180.00	230.00	8.00
8567480	●	-	-	-	8.000	0.31496	31	265.00	315.00	8.00
8567190	●	-	-	-	9.000	0.35433	16	160.00	210.00	9.00
8567390	●	-	-	-	9.000	0.35433	21	210.00	260.00	9.00
8567200	●	-	-	-	10.000	0.39370	16	180.00	240.00	10.00
8567400	●	-	-	-	10.000	0.39370	21	230.00	290.00	10.00

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



P					M			K	N		S		H					
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel					
Carbon Steel			Alloy Steel	Die Steel	300	400	17-4 PH		Aluminum		Nickel Alloy	Titanium						
Low	Medium	High							6061	7075			Casting	Inconel	6Al4V	~35 HRC	35-45 HRC	45-50 HRC
1010	1035	1065	4140	4340														
1018	1045								○	○								

○ Good ○ Best

