



List 52800


OSG PHOENIX® PAO BORE

SPEED FEED	INSERTS	ACCS.	STEEL	PACKED
1526	1191	1192		1 PIECE




EDP Number	Designation	Type	Diameter		Effective Diameter	Number of Flutes	Body Height	Flange Diameter	Bore Diameter	Keyway Width	Keyway Depth	Applicable Insert
			D (Inch)	D1 (Inch)								
52800000	PAO06R200A075-5	1	2.401	2.000	2.000	5	1.575	1.772	0.750	0.315	0.197	OZKU06 / XAHT06
52800001	PAO06R250A075-7	2	2.901	2.500	2.500	7	1.575	1.968	0.750	0.315	0.197	OZKU06 / XAHT06
52800002	PAO06R300A100-8	2	3.401	3.000	3.000	8	1.968	2.362	1.000	0.375	0.236	OZKU06 / XAHT06
52800003	PAO06R400A125-10	3	4.401	4.000	4.000	10	1.968	2.756	1.250	0.500	0.315	OZKU06 / XAHT06
52800004	PAO06R500A150-12	3	5.401	5.000	5.000	12	2.480	3.543	1.500	0.625	0.394	OZKU06 / XAHT06
52800005	PAO06R600A150-13	3	6.401	6.000	6.000	13	2.480	3.740	1.500	0.625	0.394	OZKU06 / XAHT06
52800006	PAO06R400A125W-14	4	4.401	4.000	4.000	14	1.968	2.756	1.250	0.500	0.315	OZKU06 / XAHT06
52800007	PAO06R500A150W-17	4	5.401	5.000	5.000	17	2.480	3.543	1.500	0.625	0.394	OZKU06 / XAHT06
52800008	PAO06R600A150W-20	4	6.401	6.000	6.000	20	2.480	3.740	1.500	0.625	0.394	OZKU06 / XAHT06
52800009	PAO06R800A250W-25	5	8.401	8.000	8.000	25	2.480	5.118	2.500	1.000	0.551	OZKU06 / XAHT06

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

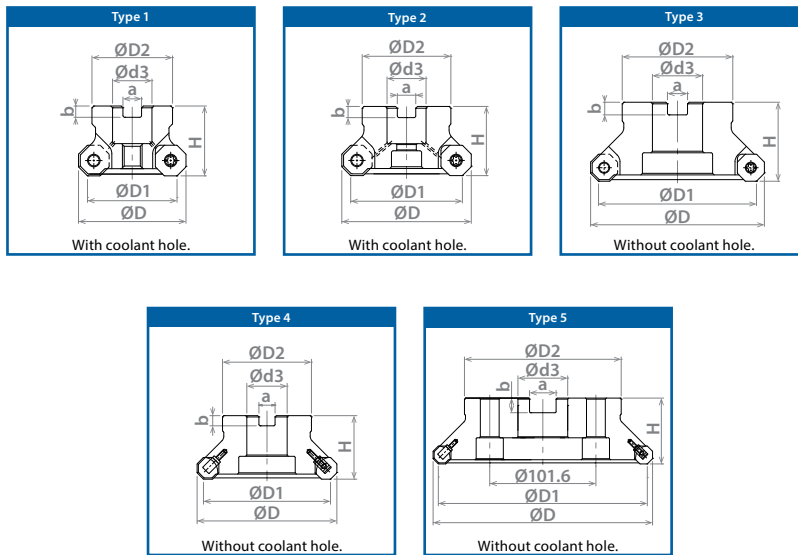

DESIGNATION EXPLANATION

PAO 06 R 200 A 075-4



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○		○	

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

