



## List 52900

OSG PHOENIX<sup>®</sup> PSF SA/FA





<b>SPEED FEED</b>	<b>INSERTS</b>	<b>ACCS.</b>	<b>STEEL</b>	<b>PACKED</b>
1527	1197	1198		1 PIECE



EDP Number	Designation	Body Type	Type	Diameter	Number of Flutes	Neck Length	Overall Length	Shank Diameter	Applicable Insert
				D (Inch)		L1 (Inch)	L (Inch)	d (Inch)	
52900000	● PSF09R100SA100-3S	Cylindrical Shank Short	1	1.000	3	1.378	4.724	1.000	SD_T09
52900001	● PSF09R125SA125-4S	Cylindrical Shank Short	1	1.250	4	1.772	5.118	1.250	SD_T09
52900002	● PSF09R150SA125-5S	Cylindrical Shank Short	2	1.500	5	1.969	5.512	1.250	SD_T09
52900004	● PSF09R100FA100-3S	Weldon Shank Short	1	1.000	3	1.551	3.831	1.000	SD_T09
52900005	● PSF09R125FA125-4S	Weldon Shank Short	1	1.250	4	2.098	4.378	1.250	SD_T09
52900006	● PSF09R150FA125-5S	Weldon Shank Short	2	1.500	5	2.098	4.378	1.250	SD_T09

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

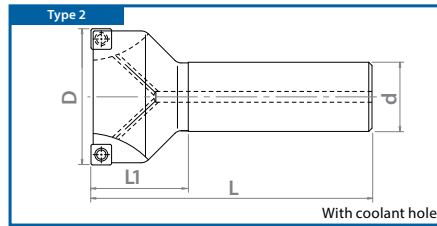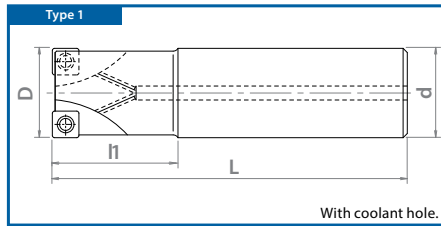

## DESIGNATION EXPLANATION

**PSF 09 R 100 SA 100-3-S**



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good    ○ Best

