



List 53100

OSG PHOENIX® PSTW BORE




SPEED FEED	INSERTS	ACCS.	STEEL	PACKED
1531	1227	1228		1 PIECE




EDP Number	Designation	Type	Diameter D (Inch)	Number of Flutes	Body Height	Flange Diameter	Bore Diameter	Keyway Width	Keyway Depth	Applicable Insert
					H (Inch)	D2 (Inch)	d3 (Inch)	a (Inch)	b (Inch)	
53100000	● PSTW12R200A075-3	1	2.000	3	1.575	1.772	0.750	0.315	0.197	TN KU12
53100001	● PSTW12R250A075-3	2	2.500	3	1.575	1.968	0.750	0.315	0.197	TN KU12
53100002	● PSTW12R300A100-5	2	3.000	5	1.968	2.362	1.000	0.375	0.236	TN KU12
53100003	● PSTW12R400A125-5	3	4.000	5	1.968	2.756	1.250	0.500	0.315	TN KU12
53100004	● PSTW12R500A150-7	3	5.000	7	2.480	3.543	1.500	0.625	0.394	TN KU12
53100010	● PSTW12R600A150-8	3	6.000	8	2.480	3.740	1.500	0.625	0.394	TN KU12
53100005	● PSTW12R200A075-4	1	2.000	4	1.575	1.772	0.750	0.315	0.197	TN KU12
53100006	● PSTW12R250A075-5	2	2.500	5	1.575	1.968	0.750	0.315	0.197	TN KU12
53100007	● PSTW12R300A100-6	2	3.000	6	1.968	2.362	1.000	0.375	0.236	TN KU12
53100008	● PSTW12R400A125-7	3	4.000	7	1.968	2.756	1.250	0.500	0.315	TN KU12
53100009	● PSTW12R500A150-9	3	5.000	9	2.480	3.543	1.500	0.625	0.394	TN KU12
53100011	● PSTW12R600A150-10	3	6.000	10	2.480	3.740	1.500	0.625	0.394	TN KU12

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

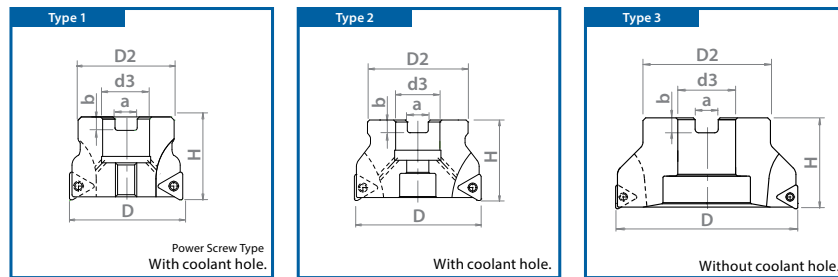

DESIGNATION EXPLANATION

PSTW 12 R 200 A 075-3



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

