



List 53200

OSG PHOENIX® PSFL SA/FA





SPEED FEED	INSERTS	ACCS.	STEEL	PACKED
1528	1203	1204		1 PIECE




EDP Number	Designation	Body Type	Type	Dia.	Number of Flutes	Number of Inserts per Flute	Total Number of Inserts	Length of Cut		Overall Length	Shank Dia.	Applicable Insert
				D (Inch)				Lc (Inch)	L1 (Inch)			
53200000	● PSFL09R125SA125-2-36	Cylindrical Shank	1	1.250	2	5	10	1.417	2.362	5.512	1.250	SD_T09
53200001	● PSFL09R150SA125-3-43	Cylindrical Shank	2	1.500	3	6	18	1.693	2.362	5.512	1.250	SD_T09
53200002	● PSFL09R125FA125-2-36	Weldon Shank	1	1.250	2	5	10	1.417	2.362	4.642	1.250	SD_T09
53200003	● PSFL09R150FA125-3-43	Weldon Shank	2	1.500	3	6	18	1.693	2.362	4.642	1.250	SD_T09

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

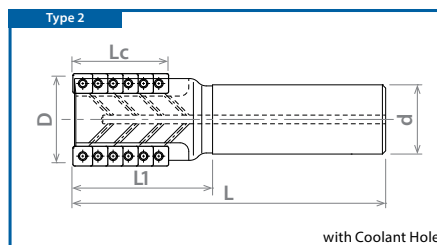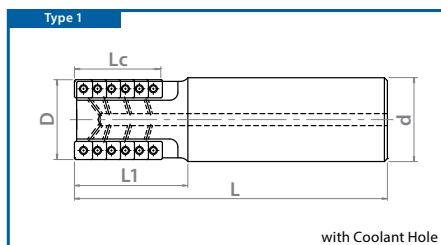

DESIGNATION EXPLANATION

PSFL 09 R 125 SA 125-2-36



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

