



List 53201

OSG PHOENIX® PSFL BORE




SPEED FEED	INSERTS	ACCS.	STEEL	PACKED
1528	1203	1204		1 PIECE




EDP Number	Designation	Type	Dia.		Number of Flutes	Number of Inserts per Flute	Total Number of Inserts	Length of Cut		Flange Dia.	Bore Diameter	Keyway		Applicable Insert
			D (Inch)					Lc (Inch)	H (Inch)			a (Inch)	b (Inch)	
53201000	● PSFL09R200A075-4-57	1	2.000		4	8	32	2.244	3.000	1.941	0.750	0.315	0.197	SD_T09
53201001	● PSFL09R200A075-4-78	1	2.000		4	11	44	3.071	4.000	1.941	0.750	0.315	0.197	SD_T09
53201002	● PSFL12R250A100-4-70	1	2.500		4	7	28	2.756	3.500	2.402	1.000	0.375	0.236	SD_T12
53201003	● PSFL12R250A100-4-110	1	2.500		4	11	44	4.331	5.000	2.402	1.000	0.375	0.236	SD_T12
53201004	● PSFL12R300A125-5-80	1	3.000		5	8	40	3.150	4.000	2.890	1.250	0.500	0.315	SD_T12
53201005	● PSFL12R300A125-5-120	1	3.000		5	12	60	4.724	5.500	2.890	1.250	0.500	0.315	SD_T12
53201006	● PSFL12R400A125-6-130	1	4.000		6	13	78	5.118	6.000	3.882	1.250	0.500	0.315	SD_T12

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

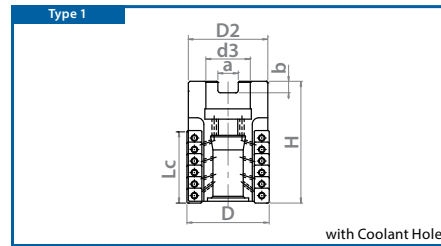

DESIGNATION EXPLANATION

PSFL 09 R 200 A 075-4-57



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

