




List 53400

OSG PHOENIX[®] PMD SA



SPEED FEED 1532-1533	INSERTS 1233-1236	ACCS. 1237	STEEL	2 FLUTE	PACKED 1 PIECE
--------------------------------	-----------------------------	----------------------	--------------	----------------	--------------------------

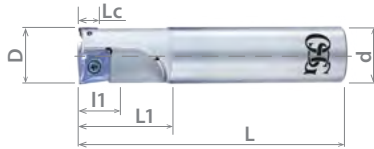

EDP Number	Designation	Body Type	Dia.		Number of Effective Flutes	Length of Cut		Drilling Depth		Neck Length		Overall Length		Shank Dia.		Center Insert	Peripheral Insert
			D (Inch)	d (Inch)		Lc (Inch)	l1 (Inch)	L1 (Inch)	L (Inch)	L (Inch)	L (Inch)	d (Inch)					
53400001	● PMD11R100SA100-1S	Cylindrical Shank Short	1.000		1	0.394	1.000	1.750	5.500	1.000	ZPNT13	ZDKT11					
53400002	● PMD11R125SA125-1S	Cylindrical Shank Short	1.250		1	0.394	1.250	2.000	6.000	1.250	ZPNT17	ZDKT11					
53400004	● PMD11R100SA100-1L	Cylindrical Shank Long	1.000		1	0.394	1.000	4.000	8.000	1.000	ZPNT13	ZDKT11					
53400005	● PMD11R125SA125-1L	Cylindrical Shank Long	1.250		1	0.394	1.250	5.000	9.000	1.250	ZPNT17	ZDKT11					

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING


MILLING

HOLDERS

INDEX

DESIGNATION EXPLANATION

PMD 11 R 100 SA 100-1S

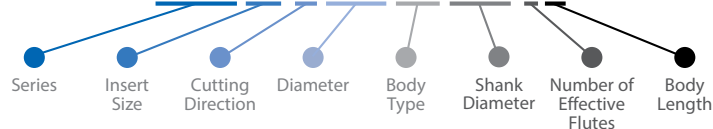

See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	⊙	⊙	⊙	⊙	⊙

Material recommendation based on inserts compatible with this tool body.

○ Good ⊙ Best

