


List 536

OSG COBALT HSS ETL

SPEED FEED 1417	HSS-Co	BR	3 FLUTE	30°			WELDON FLAT	REG	LONG	PACKED 1 PIECE
---------------------------	---------------	-----------	----------------	------------	--	--	--------------------	------------	-------------	--------------------------

Cutting Diameter Tolerance	
1/4" ≤ D ≤ 2"	+0.0011 / -0"

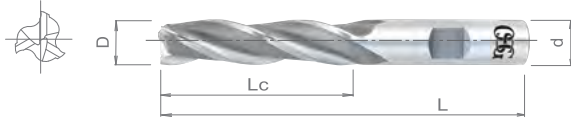

EDP Number		Diameter	Length of Cut	Overall Length	Shank Diameter
		D (Fractional Size)	Lc (Inch)	L (Inch)	d (Inch)
5360300	●	1/4	1.250	3.063	0.375
5360400	●	5/16	1.375	3.125	0.375
5360500	●	3/8	1.500	3.250	0.375
5361000	●	7/16	1.750	3.750	0.500
5361100	●	1/2	2.000	4.000	0.500
5362100	●	5/8	2.500	4.625	0.625
5363100	●	3/4	3.000	5.250	0.750
5364100	●	7/8	3.500	5.750	0.875
5365100	●	1	4.000	6.500	1.000
5366100	●	1-1/4	4.000	6.500	1.250
5366200	●	1-1/2	4.000	6.500	1.250
5366400	●	2	4.000	6.500	1.250

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked
 Note: Other coatings available upon request.



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	300	400	17-4 PH		Aluminum		Nickel Alloy	Titanium	Hardened Steel			
Low	Medium	High							6061	7075			Casting	Inconel	6Al4V (30 HRC)	~35 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
○	○	○	○	○	○	○	○	○	○	○		○	○	○		

○ Good ○ Best

