




List 567

OSG COBALT HSS DOUBLE END M-FDE, Miniature

HSS-Co	BR	4 FLUTE	30°		REG	PACKED 1 PIECE
--------	----	---------	-----	--	-----	-------------------

Cutting Diameter Tolerance	
D < Shank Dia.	+0.0011 / -0"
D = Shank Dia.	-0.0004 / -0.0015"

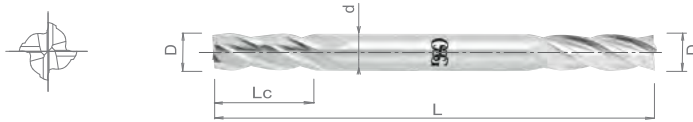

EDP Number	Diameter	Length of Cut	Overall Length	Shank Diameter	
					D (Fractional Size)
5677200	●	1/16	0.177	2.250	0.188
5677400	●	3/32	0.267	2.250	0.188
5677600	●	1/8	0.362	2.250	0.188
5677800	●	5/32	0.417	2.250	0.188
5678000	●	3/16	0.480	2.250	0.188

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked
 Note: Other coatings available upon request.



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium					
Low	Medium	High							6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH	6061	7075								
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ Good ○ Best

