



# List 6420

OSG PHOENIX<sup>®</sup> PDR SS



SPEED FEED
1538

INSERTS
1258

ACCS.
1259

STEEL


PACKED

1 PIECE




EDP Number	Designation	Body Type	Type	Diameter		Number of Flutes	Neck Dia.	Neck Length	Overall Length	Shank Dia.	Applicable Insert
				D (mm)	D1 (mm)		d1 (mm)	L1 (mm)	L (mm)	d (mm)	
7800000	● PDR20R040SS42-2S	Cylindrical Shank Short	1	40.00	20.00	2	38.90	50.00	150.00	42.00	ADMT20
7800004	● PDR20R050SS42-3S	Cylindrical Shank Short	1	50.00	30.00	3	48.50	50.00	150.00	42.00	ADMT20
7800009	● PDR20R040SS42-2L	Cylindrical Shank Long	1	40.00	20.00	2	38.90	150.00	250.00	42.00	ADMT20
7800013	● PDR20R050SS42-3L	Cylindrical Shank Long	1	50.00	30.00	3	48.50	150.00	250.00	42.00	ADMT20

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

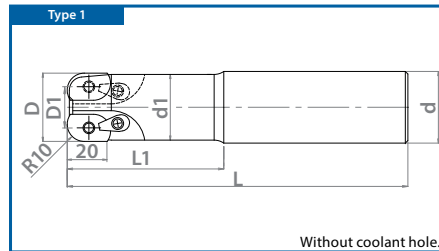

## DESIGNATION EXPLANATION

### PDR 20 R 040 SS 42-2 S



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
⊙		⊙			

Material recommendation based on inserts compatible with this tool body.

○ Good ⊙ Best

