



# A Brand ADO-MICRO

Advanced Performance Carbide Micro Drills

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX


## List 6501

A BRAND ADO-MICRO-2D



SPEED FEED 314	CARBIDE	IchAda	2 FLUTE	STUB	30°	SHANK h6	PACKED 1 PIECE
-------------------	---------	--------	---------	------	-----	-------------	-------------------

Cutting Diameter Tolerance		
Size (mm)	mm	inch
0.7 ≤ D ≤ 2	+0.00004 / +0.0004	+0.001 / +0.010

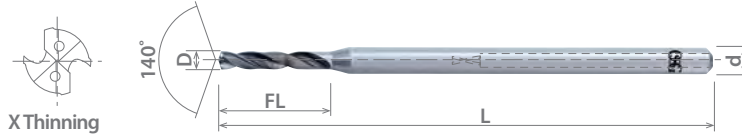

EDP Number		Diameter (D)					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
		Fractional Size	Wire Gage	Letter Size	mm	Inch			
8732001	●	-	-	-	0.700	0.02756	4.20	47.00	3.00
8732002	●	-	-	-	0.750	0.02953	4.50	47.00	3.00
8732003	●	-	-	-	0.800	0.03150	4.80	50.00	3.00
8732004	●	-	-	-	0.850	0.03346	5.10	50.00	3.00
8732005	●	-	-	-	0.900	0.03543	5.40	50.00	3.00
8732006	●	-	-	-	0.950	0.03740	5.70	50.00	3.00
8732007	●	-	-	-	1.000	0.03937	6.00	53.00	3.00
8732008	●	-	-	-	1.100	0.04331	6.60	53.00	3.00
8732009	●	-	-	-	1.200	0.04724	7.20	53.00	3.00
8732010	●	-	-	-	1.300	0.05118	7.80	53.00	3.00
8732011	●	-	-	-	1.400	0.05512	8.40	53.00	3.00
8732012	●	-	-	-	1.500	0.05906	9.00	53.00	3.00
8732013	●	-	-	-	1.600	0.06299	9.60	53.00	3.00
8732014	●	-	-	-	1.700	0.06693	10.20	53.00	3.00
8732015	●	-	-	-	1.800	0.07087	10.80	53.00	3.00
8732016	●	-	-	-	1.900	0.07480	11.40	53.00	3.00
8732017	●	-	-	-	2.000	0.07874	12.00	58.00	3.00

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked  
 Note: Can be used as Pilot Drill for long type drills (ADO-MICRO 12D, 20D, and 30D).



P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium					
Low	Medium	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1010	1035	1065	4140	4340	○	○	○	○	○	○	○	○	○	○	○	○	○
1018	1045				○	○	○	○	○	○	○	○	○	○	○	○	○

○ Good ○ Best

