



## List 6502

A BRAND ADO-MICRO-5D



SPEED FEED  
314

CARBIDE

IchAda



2 FLUTE


JOBBER

30°

SHANK  
h6

PACKED  
1 PIECE

Cutting Diameter Tolerance		
Size (mm)	mm	inch
0.7 ≤ D ≤ 2	+0 / -0.009	+0 / -0.0004

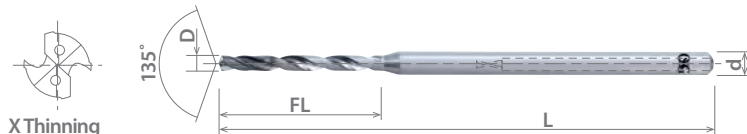

X Thinning

EDP Number	●	Diameter (D)					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
		Fractional Size	Wire Gage	Letter Size	mm	Inch			
8732018	●	-	-	-	0.700	0.02756	7.00	47.00	3.00
8732019	●	-	-	-	0.750	0.02953	7.50	47.00	3.00
8732020	●	-	-	-	0.800	0.03150	8.00	50.00	3.00
8732021	●	-	-	-	0.850	0.03346	8.50	50.00	3.00
8732022	●	-	-	-	0.900	0.03543	9.00	50.00	3.00
8732023	●	-	-	-	0.950	0.03740	9.50	50.00	3.00
8732024	●	-	-	-	1.000	0.03937	10.00	55.00	3.00
8732025	●	-	-	-	1.100	0.04331	11.00	55.00	3.00
8732026	●	-	-	-	1.200	0.04724	12.00	60.00	3.00
8732027	●	-	-	-	1.300	0.05118	13.00	60.00	3.00
8732028	●	-	-	-	1.400	0.05512	14.00	60.00	3.00
8732029	●	-	-	-	1.500	0.05906	15.00	60.00	3.00
8732030	●	-	-	-	1.600	0.06299	16.00	60.00	3.00
8732031	●	-	-	-	1.700	0.06693	17.00	60.00	3.00
8732032	●	-	-	-	1.800	0.07087	18.00	65.00	3.00
8732033	●	-	-	-	1.900	0.07480	19.00	65.00	3.00
8732034	●	-	-	-	2.000	0.07874	20.00	65.00	3.00

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium	Hardened Steel						
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ Good ○ Best

