




List 7132

EXOCARB® DIAMOND LS-CR, Long Shank

SPEED FEED 1383	CARBIDE	DIA	12µm	4 FLUTE	30°	SHANK h6	STUB	PACKED 1 PIECE
---------------------------	----------------	------------	-------------	----------------	------------	--------------------	-------------	--------------------------

Cutting Diameter Tolerance	
12mm ≤ D ≤ 25mm	+0 / -0.020mm

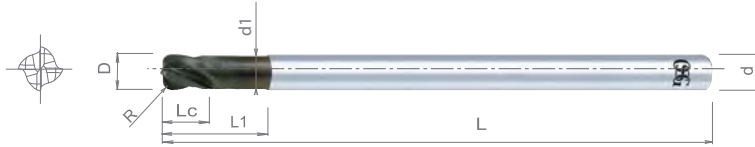

EDP Number		Diameter		Corner Radius		Length of Cut		Neck Length		Neck Diameter		Overall Length		Shank Diameter	
		D (mm)	R (mm)	R (mm)	Lc (mm)	L1 (mm)	d1 (mm)	L (mm)	d (mm)						
71320116	●	3.00	0.50	3.00	15.00	2.85	75.00	3.00							
71320216	●	4.00	0.50	4.00	20.00	3.80	75.00	4.00							
71320316	●	6.00	0.50	6.00	30.00	5.70	100.00	6.00							
71320416	●	6.00	1.00	6.00	30.00	5.70	100.00	6.00							
71320516	●	8.00	0.50	8.00	30.00	7.60	100.00	8.00							
71320616	●	8.00	1.00	8.00	32.00	7.60	100.00	8.00							
71320716	●	10.00	0.50	10.00	40.00	9.50	125.00	10.00							
71320816	●	10.00	1.00	10.00	40.00	9.50	125.00	10.00							
71320916	●	12.00	0.50	12.00	48.00	11.40	150.00	12.00							
71321016	●	12.00	1.00	12.00	48.00	11.40	150.00	12.00							

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N			S		Other	
Steel					Stainless Steel			Cast Iron	Non-Ferrous			HRSA		Graphite	Cobalt-Chrome
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Mg		Brass, Bronze	Nickel Alloy	Titanium				
Low	Medium	High			6061	7075						Casting	Inconel		
1010	1035	1065	4140	4340	300	400	17-4 PH								
1018	1045							○	○					○	

○ Good ○ Best

