




## List 78016

OSG PHOENIX<sup>®</sup> PSE SF, Screw Fit Head



<b>SPEED FEED</b>	<b>INSERTS</b>	<b>ACCS.</b>	<b>STEEL</b>	<b>PACKED</b>
1529	1213-1215	1216		1 PIECE

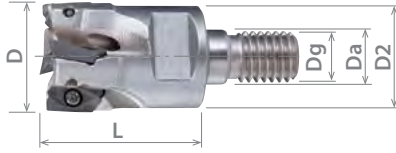

EDP Number	Designation	Diameter	Number of Flutes	Pilot Diameter	Thread Size	Flange Diameter	Overall Length	Spanner Wrench	Applicable Insert
		D (mm)		Da (mm)	Dg (mm)	D2 (mm)	L (mm)		
7803822	▲ PSE07R010SF6-2	10.00	2	6.50	M6	9.00	26.00	7	ZDKT07
7803823	▲ PSE07R012SF6-3	12.00	3	6.50	M6	11.00	26.00	7	ZDKT07
7801600	▲ PSE11R016SF8-2	16.00	2	8.50	M8	14.50	27.00	10	ZD_T11
7803824	▲ PSE07R016SF8-4	16.00	4	8.50	M8	14.50	27.00	10	ZDKT07
7801612	▲ PSE11R017SF8-2	17.00	2	8.50	M8	14.50	27.00	10	ZD_T11
7801613	▲ PSE11R018SF8-2	18.00	2	8.50	M8	14.50	27.00	10	ZD_T11
7801601	▲ PSE11R020SF10-3	20.00	3	10.50	M10	18.00	33.00	14	ZD_T11
7803825	▲ PSE07R020SF10-4	20.00	4	10.50	M10	18.00	33.00	14	ZDKT07
7801614	▲ PSE11R021SF10-3	21.00	3	10.50	M10	18.00	33.00	14	ZD_T11
7801615	▲ PSE11R022SF10-3	22.00	3	10.50	M10	18.00	33.00	14	ZD_T11
7801607	▲ PSE15R025SF12-2	25.00	2	12.50	M12	23.00	35.00	17	ZDKT15
7801602	▲ PSE11R025SF12-4	25.00	4	12.50	M12	23.00	35.00	17	ZD_T11
7803826	▲ PSE07R025SF12-5	25.00	5	12.50	M12	23.00	35.00	17	ZDKT07
7801618	▲ PSE15R026SF12-2	26.00	2	12.50	M12	23.00	35.00	17	ZDKT15
7801616	▲ PSE11R026SF12-3	26.00	3	12.50	M12	23.00	35.00	17	ZD_T11
7801608	▲ PSE15R028SF12-2	28.00	2	12.50	M12	23.00	35.00	17	ZDKT15
7801603	▲ PSE11R028SF12-4	28.00	4	12.50	M12	23.00	35.00	17	ZD_T11
7801609	▲ PSE15R032SF16-3	32.00	3	17.00	M16	28.00	40.00	22	ZDKT15
7801604	▲ PSE11R032SF16-5	32.00	5	17.00	M16	28.00	40.00	22	ZD_T11
7803827	▲ PSE07R032SF17-6	32.00	6	17.00	M16	28.00	35.00	22	ZDKT07
7801617	▲ PSE11R033SF16-3	33.00	3	17.00	M16	28.00	40.00	22	ZD_T11
7801619	▲ PSE15R033SF16-3	33.00	3	17.00	M16	28.00	40.00	22	ZDKT15
7801610	▲ PSE15R035SF16-3	35.00	3	17.00	M16	28.00	40.00	22	ZDKT15
7801605	▲ PSE11R035SF16-5	35.00	5	17.00	M16	28.00	40.00	22	ZD_T11
7801611	▲ PSE15R040SF16-4	40.00	4	17.00	M16	28.00	40.00	22	ZDKT15
7801606	▲ PSE11R040SF16-6	40.00	6	17.00	M16	28.00	40.00	22	ZD_T11


● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).



## DESIGNATION EXPLANATION

**PSE 11 R 016 SF 8-2**



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

