




List 78017

OSG PHOENIX® PRC SF, Screw Fit Head



SPEED FEED 1536-1537	INSERTS 1254	ACCS. 1255	STEEL	PACKED 1 PIECE
--------------------------------	------------------------	----------------------	--------------	--------------------------

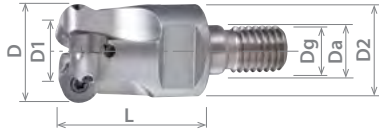

EDP Number	Designation	Diameter		Number of Flutes	Pilot Diameter	Thread Size	Flange Diameter	Overall Length	Spanner Wrench	Applicable Insert
		D (mm)	D1 (mm)		Da (mm)	Dg (mm)	D2 (mm)	L (mm)		
7801700	▲ PRC10R020SF10-2	20.00	10.00	2	10.50	M10	18.00	33.00	14	RPH_10
7801701	▲ PRC10R025SF12-3	25.00	15.00	3	12.50	M12	23.00	35.00	17	RPH_10
7801702	▲ PRC10R030SF16-3	30.00	20.00	3	17.00	M16	28.00	40.00	22	RPH_10
7801703	▲ PRC10R032SF16-4	32.00	22.00	4	17.00	M16	28.00	40.00	22	RPH_10
7801704	▲ PRC10R040SF16-4	40.00	30.00	4	17.00	M16	28.00	40.00	22	RPH_10
7801705	▲ PRC12R030SF16-2	30.00	18.00	2	17.00	M16	28.00	40.00	22	RPH_12
7801706	▲ PRC12R032SF16-3	32.00	20.00	3	17.00	M16	28.00	40.00	22	RPH_12
7801707	▲ PRC12R040SF16-3	40.00	28.00	3	17.00	M16	28.00	40.00	22	RPH_12

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

DESIGNATION EXPLANATION

PRC 10 R 020 SF 10-2



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

