



List 78029

OSG PHOENIX® PSEL SS, Cylindrical Shank





SPEED FEED	INSERTS	ACCS.	STEEL	PACKED
1530	1221-1223	1224		1 PIECE



EDP Number	Designation	Type	Dia.		Number of Flutes	Number of Inserts per Flute	Total Number of Inserts	Length of Cut		Overall Length	Shank Dia.		Applicable Insert
			D (mm)	d (mm)				Lc (mm)	L1 (mm)		L (mm)	d (mm)	
7802900	▲ PSEL11R025SS25-2-27	1	25.00		2	3	6	27.00	50.00	125.00	25.00		ZD_T11
7802901	▲ PSEL11R032SS32-2-37	1	32.00		2	4	8	37.00	60.00	140.00	32.00		ZD_T11
7802902	▲ PSEL11R032SS32-3-45	1	32.00		3	5	15	45.50	60.00	140.00	32.00		ZD_T11
7802903	▲ PSEL11R040SS42-3-37	1	40.00		3	4	12	37.00	60.00	140.00	42.00		ZD_T11
7802904	▲ PSEL11R040SS42-4-45	1	40.00		4	5	20	45.50	60.00	140.00	42.00		ZD_T11
7802905	▲ PSEL15R040SS42-2-38	1	40.00		2	3	6	38.00	60.00	140.00	42.00		ZDKT15
7802906	▲ PSEL15R050SS42-3-50	2	50.00		3	4	12	50.50	64.00	144.00	42.00		ZDKT15

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).

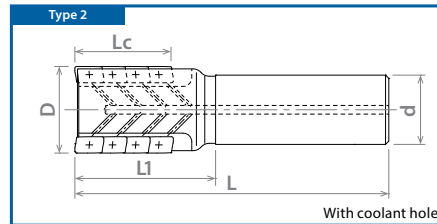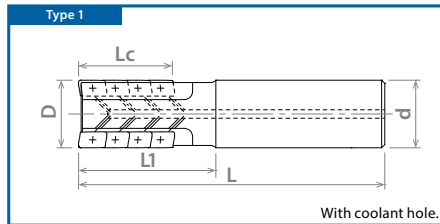

DESIGNATION EXPLANATION

PSEL 11 R 025 SS 25-2-27



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRS A	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

