




List 78034

OSG PHOENIX® PLDS SS, Cylindrical



SPEED FEED	INSERTS	ACCS.	STEEL	1 FLUTE	PACKED
371	303	304			1 PIECE

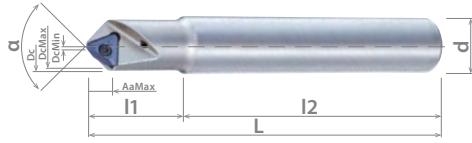

EDP Number	Designation	Diameter			Length of Cut			Shank			Point Angle	Applicable Insert
		D (mm)	Dmin (mm)	Dmax (mm)	Lc (mm)	L1 (mm)	L (mm)	d (mm)	L2 (mm)			
7803401	▲ PLDS11R002SS16-90	14.40	2.50	13.50	5.80	30.00	110.00	16.00	80.00	90	TPKT11	
7803402	▲ PLDS11R002SS16-L90	14.40	2.50	13.50	5.80	30.00	200.00	16.00	170.00	90	TPKT11	
7803403	▲ PLDS11R002SS16-120	17.30	2.40	16.00	4.00	30.00	110.00	16.00	80.00	120	TPKT11	
7803404	▲ PLDS11R002SS16-L120	17.30	2.40	16.00	4.00	30.00	200.00	16.00	170.00	120	TPKT11	

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

DESIGNATION EXPLANATION

PLDS-11-R-002-SS-16-90



See Full Detail on Page 360

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

