



## List 78114

OSG PHOENIX® PFB SF, Screw Fit Head



SPEED FEED
1542-1543

INSERTS
1268-1272


ACCS.
1273

STEEL
-------

CARBIDE
---------

2 FLUTE
---------

PACKED
1 PIECE

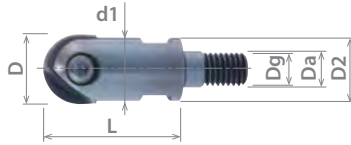

EDP Number	Designation	Diameter	Corner Radius	Neck Diameter	Pilot Diameter	Thread Size	Flange Diameter	Overall Length	Spanner Wrench	Applicable Insert
		D (mm)	R (mm)	d1 (mm)	Da (mm)	Dg (mm)	D2 (mm)	L (mm)		
7801490	▲ PFB-R100SF6	10.00	5.00	9.00	6.50	M6	9.00	26.00	7	PFB100
7801491	▲ PFB-R120SF6	12.00	6.00	11.00	6.50	M6	11.00	26.00	7	PFB120
7801492	▲ PFB-R160SF8	16.00	8.00	14.00	8.50	M8	14.50	32.00	10	PFB160
7801493	▲ PFB-R200SF10	20.00	10.00	18.00	10.50	M10	18.00	38.00	14	PFB200
7801494	▲ PFB-R250SF12	25.00	12.50	22.00	12.50	M12	23.00	38.00	17	PFB250
7801495	▲ PFB-R300SF16	30.00	15.00	27.00	17.00	M16	28.00	43.00	22	PFB300

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING


MILLING

HOLDERS

INDEX

## DESIGNATION EXPLANATION

**PFB-R 100 SF 6**



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

