



List 78120

OSG PHOENIX® PAO BORE




SPEED FEED	INSERTS	ACCS.	STEEL	PACKED
1526	1191	1192		1 PIECE




EDP Number	Designation	Type	Diameter		Number of Flutes	Body Height	Flange Diameter	Bore Diameter	Keyway Width	Keyway Depth	Applicable Insert
			D (mm)	D1 (mm)		H (mm)	D2 (mm)	d3 (mm)	a (mm)	b (mm)	
7802020	PAO06R050M22-5	1	60.20	50.00	5	40.00	45.00	22.00	10.40	6.30	OZKU06 / XAHT06
7802021	PAO06R063M22-7	2	73.20	63.00	7	40.00	50.00	22.00	10.40	6.30	OZKU06 / XAHT06
7802022	PAO06R080M25.4-8	2	90.20	80.00	8	50.00	60.00	25.40	9.50	6.00	OZKU06 / XAHT06
7802023	PAO06R100M31.7-10	3	110.20	100.00	10	50.00	70.00	31.75	12.70	8.00	OZKU06 / XAHT06
7802024	PAO06R125M38.1-12	3	135.20	125.00	12	63.00	90.00	38.10	15.90	10.00	OZKU06 / XAHT06
7802089	PAO06R100M31.7W-14	4	110.20	100.00	14	50.00	70.00	31.75	12.70	8.00	OZKU06 / XAHT06
7802091	PAO06R125M38.1W-17	4	135.20	125.00	17	63.00	90.00	38.10	15.90	10.00	OZKU06 / XAHT06
7802093	PAO06R160M50.8W-20	4	170.20	160.00	20	63.00	100.00	50.80	19.00	11.00	OZKU06 / XAHT06
7802095	PAO06R200M47.6W-25	5	210.20	200.00	25	63.00	150.00	47.63	25.40	14.00	OZKU06 / XAHT06

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

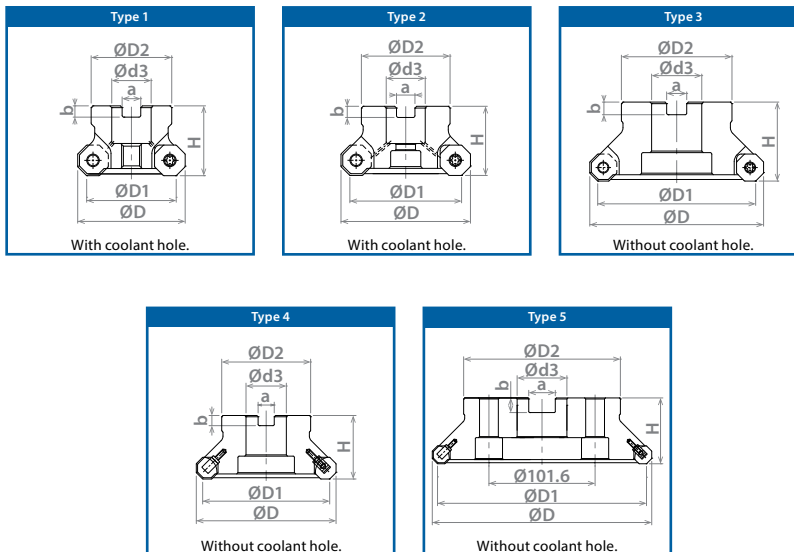

DESIGNATION EXPLANATION

PAO 06 R 050 M 22-4



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○		○	

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

