



List 78137

OSG PHOENIX® PSFL BORE



SPEED FEED
1528

INSERTS
1203

ACCS.
1204

STEEL




PACKED
1 PIECE




EDP Number	Designation	Type	Dia.	Number of Flutes	Number of Inserts per Flute	Total Number of Inserts	Length of Cut		Flange Dia.	Bore Diameter		Keyway Width	Keyway Depth	Applicable Insert
			D (mm)				Lc (mm)	H (mm)		D2 (mm)	d3 (mm)			
7803702	▲ PSFL09R050M22-4-50	1	50.00	4	7	28	50.00	75.00	48.50	22.00	10.40	6.30	SD_T09	
7803703	▲ PSFL09R050M22-4-78	1	50.00	4	11	44	78.00	100.00	48.50	22.00	10.40	6.30	SD_T09	
7803706	▲ PSFL12R063M27-4-60	1	63.00	4	6	24	60.00	85.00	60.50	27.00	12.40	7.00	SD_T12	
7803707	▲ PSFL12R063M27-4-100	1	63.00	4	10	40	100.00	125.00	60.50	27.00	12.40	7.00	SD_T12	
7803708	▲ PSFL12R080M32-5-70	1	80.00	5	7	35	70.00	95.00	77.30	32.00	14.40	8.00	SD_T12	
7803709	▲ PSFL12R080M32-5-110	1	80.00	5	11	55	110.00	143.00	77.30	32.00	14.40	8.00	SD_T12	

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

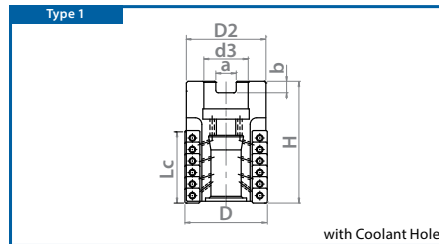

DESIGNATION EXPLANATION

PSFL 09 R 050 M 22-4-50



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

