




List 78220

OSG PHOENIX® PFR SF, Screw Fit Head



SPEED FEED 1544-1545	INSERTS 1278-1283	ACCS. 1284	STEEL	CARBIDE	2 FLUTE	PACKED 1 PIECE
--------------------------------	-----------------------------	----------------------	--------------	----------------	----------------	--------------------------

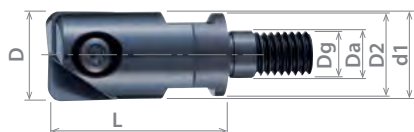

EDP Number	Designation	Diameter	Neck Diameter	Pilot Diameter	Thread Size	Flange Diameter	Overall Length	Spanner Wrench	Applicable Insert
		D (mm)	d1 (mm)	Da (mm)	Dg (mm)	D2 (mm)	L (mm)		
7832090	▲ PFR-R100SF6	10.00	9.00	6.50	M6	9.00	26.00	7	PFR100 / PFR110
7832091	▲ PFR-R120SF6	12.00	11.00	6.50	M6	11.00	26.00	7	PFR120 / PFR130
7832092	▲ PFR-R160SF8	16.00	15.00	8.50	M8	14.50	32.00	10	PFR160 / PFR170
7832093	▲ PFR-R200SF10	20.00	19.00	10.50	M10	18.00	38.00	14	PFR200 / PFR210
7832094	▲ PFR-R250SF12	25.00	24.00	12.50	M12	23.00	38.00	17	PFR250 / PFR260
7832095	▲ PFR-R300SF16	30.00	29.00	17.00	M16	28.00	43.00	22	PFR300
7832096	▲ PFR-R320SF16	32.00	31.00	17.00	M16	28.00	43.00	22	PFR320

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



DESIGNATION EXPLANATION

PFR-R 100 SF 6



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

