



List 78321

OSG PHOENIX® PZAG SS, Cylindrical





SPEED FEED	INSERTS	ACCS.	STEEL	2 FLUTE	PACKED
370	298	299			1 PIECE



EDP Number	Designation	Diameter		Drilling Depth		Neck Length		Overall Length		Shank Diameter		Min. Drill Hole Size		Max Stepover for Plunging		Type	Applicable Insert
		D (mm)	I1 (mm)	L1 (mm)	L (mm)	d (mm)	d (mm)	Ar Max (mm)	Ar Max (mm)								
7832100	▲ PZAG04R014SS20-2	14.00	21.00	30.00	100.00	20.00	6.00	4.00	1	ZPNT04							
7832101	▲ PZAG06R0175SS20-2	17.50	26.00	35.00	105.00	20.00	5.50	6.00	1	ZPNT06							
7832102	▲ PZAG06R020SS20-2	20.00	30.00	40.00	110.00	20.00	8.00	6.00	1	ZPNT06							
7832103	▲ PZAG06R023SS25-2	23.00	34.50	50.00	125.00	25.00	11.00	6.00	1	ZPNT06							
7832104	▲ PZAG09R026SS25-2	26.00	39.00	55.00	130.00	25.00	8.00	9.00	2	ZPNT09							
7832105	▲ PZAG09R029SS32-2	29.00	43.50	60.00	140.00	32.00	11.00	9.00	1	ZPNT09							
7832106	▲ PZAG09R032SS32-2	32.00	48.00	65.00	145.00	32.00	14.00	9.00	1	ZPNT09							
7832107	▲ PZAG09R035SS32-2	35.00	52.50	70.00	150.00	32.00	17.00	9.00	2	ZPNT09							
7832108	▲ PZAG09R039SS32-2	39.00	58.50	80.00	160.00	32.00	21.00	9.00	2	ZPNT09							
7832109	▲ PZAG09R043SS32-2	43.00	64.50	90.00	170.00	32.00	25.00	9.00	2	ZPNT09							
7832110	▲ PZAG09R048SS32-2	48.00	72.00	100.00	180.00	32.00	30.00	9.00	2	ZPNT09							

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

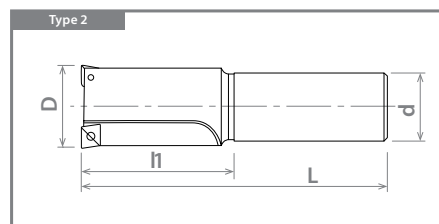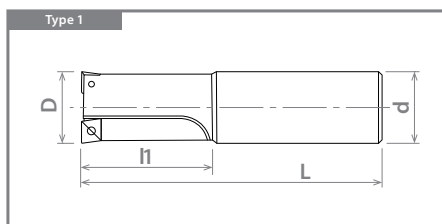

DESIGNATION EXPLANATION

PZAG-04-R-014-SS-20-2



See Full Detail on Page 360

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

