



# A Brand AE-VMSS

Advanced Performance Anti-Vibration Carbide End Mills

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

## List 8206

A BRAND AE-VMSS



SPEED FEED  
1336

CARBIDE

DUARISE

4 FLUTE

37-40°




SHANK  
h6

STUB

PACKED  
1 PIECE

Cutting Diameter Tolerance	
3mm ≤ D ≤ 12mm	+0 / -0.020mm

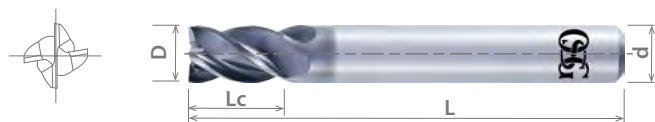


EDP Number			Diameter		Length of Cut	Overall Length	Shank Diameter	Type
			D (mm)	Lc (mm)	L (mm)	d (mm)		
8556430		●	3.00	4.50	45.00	6.00	1	
8556440		●	4.00	6.00	45.00	6.00	1	
8556450		●	5.00	7.50	45.00	6.00	1	
8556460		●	6.00	9.00	45.00	6.00	2	
8556480		●	8.00	12.00	60.00	8.00	2	
8556500		●	10.00	15.00	70.00	10.00	2	
8556520		●	12.00	18.00	75.00	12.00	2	

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



Type 1

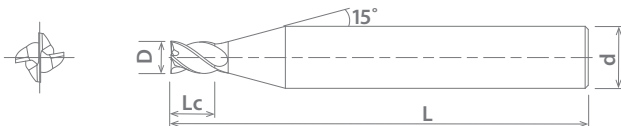

Type 2



P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium					
Low	Medium	High			300	400	17-4 PH	6061	Casting	Inconel			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	○	○	○	○	○	○	○	○	○	○	○	○	○
1018	1045				○	○	○	○	○	○	○	○	○	○	○	○	○

○ Good ○ Best

