



A Brand AE-VMS-RA

Advanced Performance Anti-Vibration Carbide End Mills

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

List 8225

A BRAND AE-VMS-RA, Right Angle Type



NEW

SPEED FEED
1338-1339

CARBIDE

DUARISE

4 FLUTE


37-40°

SHANK
h6

REG



PACKED
1 PIECE

Cutting Diameter Tolerance	
3mm ≤ D ≤ 6mm	+0 / -0.020mm




EDP Number		Diameter	Length of Cut	Overall Length	Shank Diameter	Type
		D (mm)	Lc (mm)	L (mm)	d (mm)	
8555730	▲	3.00	8.00	60.00	6.00	1
8555740	▲	4.00	11.00	60.00	6.00	1
8555750	▲	5.00	13.00	60.00	6.00	1
8555760	▲	6.00	13.00	60.00	6.00	2

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

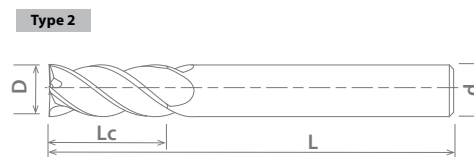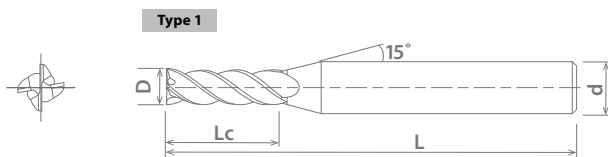


Right Angle Type for Milling Straight Corners

Right Angle Type
AE-VMSS, VMS(-RA)



Straight corners with no uncut residue.

Square Type
AE-VMSS, VMS



Choose the right angle type for milling straight corners!

Choose the square type for high processing efficiency!

See page 6 for details

P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium					
Low	Medium	High							6061 7075 Casting				Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1010	1035	1045	1065	4140	4340	300	400	17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ Good ○ Best

