



A Brand AE-VTSS

Anti-Vibration, Multi-functional Carbide End Mill Compatible with CNC Lathes

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

List 8233

A BRAND AE-VTSS



NEW

SPEED FEED
1345-1346

CARBIDE

DUARISE

3 FLUTE

40-43°




SHRINK FIT

STUB

PACKED
1 PIECE


Cutting Diameter Tolerance

1/8" ≤ D ≤ 1/2" +0 / -0.0008"

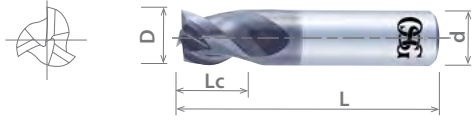

EDP Number	Diameter	Length of Cut	Neck Length	Non-Taper Neck Length	Overall Length	Shank Diameter	Type
82330021	● 1/8	0.188	-	-	2.000	0.125	2
82330121	○ 9/64	0.211	0.386	0.299	2.000	0.188	1
82330221	○ 5/32	0.234	0.378	0.323	2.000	0.188	1
82330321	● 3/16	0.281	-	-	2.000	0.188	2
82330421	● 1/4	0.250	-	-	2.000	0.250	2
82330521	● 3/8	0.375	-	-	2.500	0.375	2
82330621	● 1/2	0.500	-	-	2.500	0.375	3

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

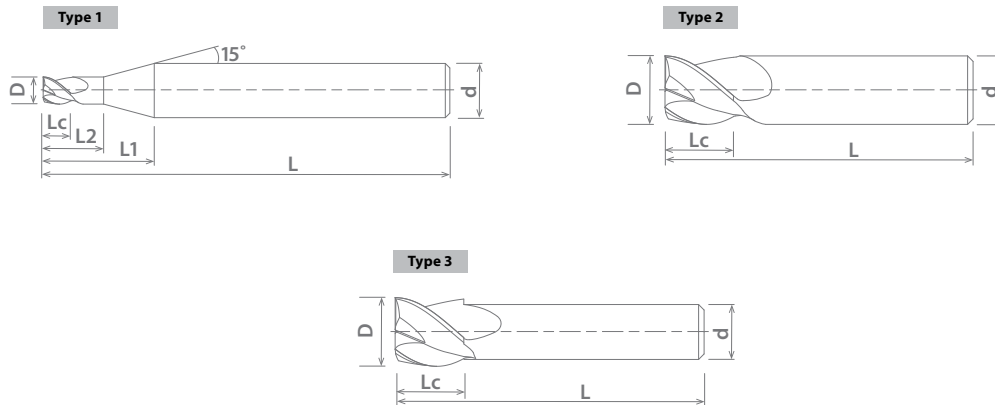

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium				
Low	Medium	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
○	○	○	○	○	○	○	○	○	○	○		○	○	○	○	○

○ Good ○ Best

