



List 8235

A BRAND AE-LN-VMSS, Long Neck



SPEED FEED
1337

CARBIDE

DUARISE

4 FLUTE

37-40°




SHANK
h6

STUB

PACKED
1 PIECE

Cutting Diameter Tolerance	
6mm ≤ D ≤ 12mm	+0 / -0.020mm

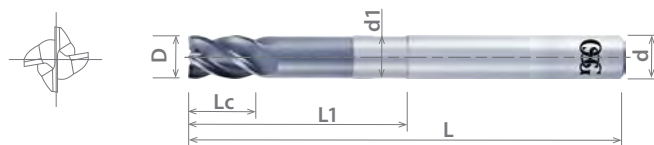

EDP Number		Diameter		Length of Cut		Neck Length		Neck Diameter		Overall Length		Shank Diameter	
		D (mm)	Lc (mm)	L1 (mm)	d1 (mm)	L (mm)	d (mm)						
8556618	●	6.00	9.00	5.80	18.00	60.00	6.00						
8556630	●	6.00	9.00	5.80	30.00	70.00	6.00						
8556724	●	8.00	12.00	7.70	24.00	70.00	8.00						
8556740	●	8.00	12.00	7.70	40.00	80.00	8.00						
8556830	●	10.00	15.00	9.70	30.00	80.00	10.00						
8556850	●	10.00	15.00	9.70	50.00	100.00	10.00						
8556936	●	12.00	18.00	11.70	36.00	90.00	12.00						
8556960	●	12.00	18.00	11.70	60.00	110.00	12.00						

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium				
Low	Medium	High			300	400	17-4 PH	6061	Casting	Inconel			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ Good ○ Best

