

# A Brand AE-BM-H



Advanced Performance Carbide End Mills with DUOREY Coating

## List 8430

A BRAND AE-BM-H



SPEED FEED  
1467-1470

CARBIDE

DUOREY

4 FLUTE

40°




SHANK  
h4

STUB

REG

PACKED  
1 PIECE

Cutting Diameter Tolerance	
1/8" ≤ D ≤ 3/16"	+/- 0.00028"
5/16" ≤ D ≤ 1/2"	+/- 0.00039"

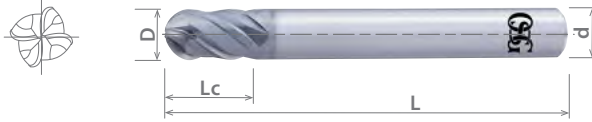

EDP Number		Diameter		Length of Cut	Overall Length	Shank Diameter
		D (Fractional Size)	Lc (Inch)	L (Inch)	d (Inch)	
84300023	●	1/8	0.250	2.000	0.125	
84300123	●	3/16	0.375	2.500	0.188	
84300223	●	1/4	0.500	3.500	0.250	
84300323	●	5/16	0.625	4.000	0.313	
84300423	●	3/8	0.750	4.000	0.375	
84300523	●	1/2	0.875	4.375	0.500	

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H						
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel						
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium							
Low	Medium	High			300	400	17-4 PH	6061 7075	Casting	Inconel			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
1010	1035	1065	4140	4340															
1018	1045																		

○ Good ⊙ Best

