



List 8540

A BRAND AE-MS-H



NEW SIZES

SPEED FEED
1348-1349

CARBIDE

DUOREY

43°




SHANK
h6

REG

LONG

PACKED
1 PIECE

Cutting Diameter Tolerance	
1mm ≤ D ≤ 20mm	+0 / -0.020mm

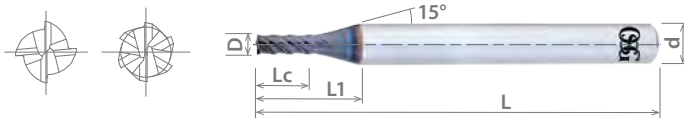


EDP Number		Diameter		Length of Cut		Neck Length		Overall Length		Shank Diameter		Number of Flutes	Type	Center Cutting
		D (mm)	Lc (mm)	L1 (mm)	L (mm)	d (mm)								
8549710	●	1.00	2.50	12.70	60.00	6.00	4	1	-					
8549715	●	1.50	3.80	13.00	60.00	6.00	4	1	-					
85400023	○	1.50	4.00	-	60.00	6.00	4	1	-					
8549720	●	2.00	5.00	13.90	60.00	6.00	4	1	-					
85400123	○	2.00	6.00	-	60.00	6.00	4	1	-					
8549725	●	2.50	6.30	14.50	60.00	6.00	4	1	-					
85400223	●	2.50	8.00	-	60.00	6.00	4	1	-					
8549730	●	3.00	7.50	15.40	60.00	6.00	4	1	●					
85400323	●	3.00	8.00	-	60.00	6.00	4	1	●					
8549740	●	4.00	10.00	16.10	60.00	6.00	4	1	●					
8549750	●	5.00	12.50	16.70	60.00	6.00	4	1	●					
8549760	●	6.00	15.00	-	60.00	6.00	6	2	●					
8549780	●	8.00	20.00	-	70.00	8.00	6	2	●					
8549810	●	10.00	25.00	-	80.00	10.00	6	2	●					
8549812	●	12.00	30.00	-	90.00	12.00	6	2	●					
8549816	●	16.00	40.00	-	105.00	16.00	6	2	●					
8549820	●	20.00	50.00	-	120.00	20.00	6	2	●					

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



Type1

Type2

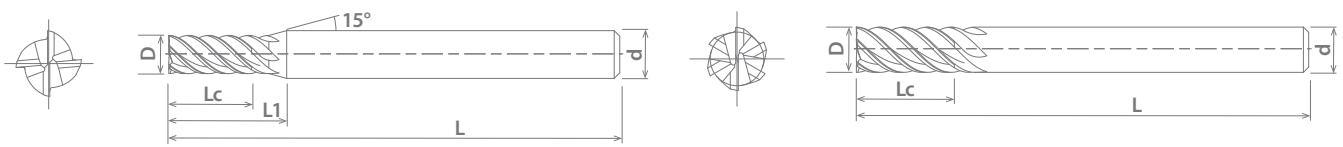

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium							
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH						○	○	○	○
1018	1045														○	○

○ Good ○ Best



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX