



List 8541

A BRAND AE-MSS-H, Reduced Neck



NEW

SPEED FEED
1347

CARBIDE

DUREY

43°




SHANK
h6

STUB

PACKED
1 PIECE

Cutting Diameter Tolerance	
3mm ≤ D ≤ 12mm	+0 / -0.020mm

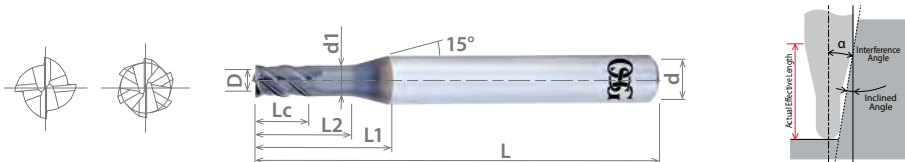

EDP Number	Dia.	Length of Cut	Neck Length	Non-Taper Neck Length	Neck Dia.	Interference Angle	Effective Neck Length by Incline Angle					Overall Length	Shank Dia.	No. of Flutes	Type
							0.5° (mm)	1.0° (mm)	1.5° (mm)	2.0° (mm)	3.0° (mm)				
8549830	3.00	4.50	14.80	9.00	2.85	5.8	9.46	9.87	10.23	10.62	11.48	45.00	6.00	4	1
8549831	4.00	6.00	16.00	12.00	3.85	3.6	12.60	13.09	13.56	14.07	15.21	50.00	6.00	4	1
8549832	5.00	7.50	17.10	15.00	4.85	1.7	15.72	16.30	16.88	-	-	60.00	6.00	4	1
8549833	6.00	9.00	-	18.00	5.85	-	-	-	-	-	-	80.00	6.00	6	2
8549834	8.00	12.00	-	24.00	7.85	-	-	-	-	-	-	90.00	8.00	6	2
8549835	10.00	15.00	-	30.00	9.85	-	-	-	-	-	-	100.00	10.00	6	2
8549836	12.00	18.00	-	36.00	11.80	-	-	-	-	-	-	110.00	12.00	6	2

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG


DRILLING

THREADING

MILLING

HOLDERS

INDEX

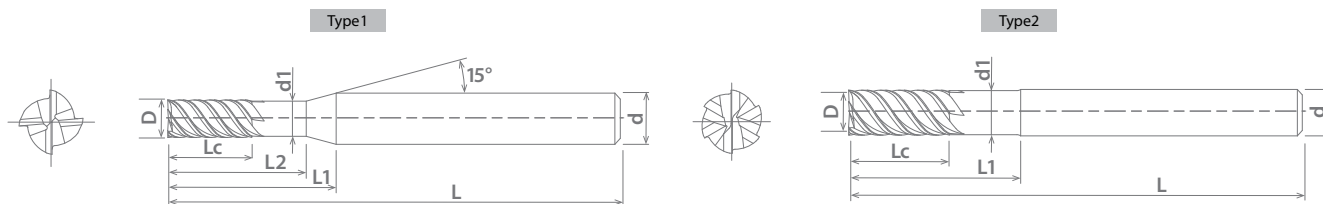

P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium								
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1010	1035	1045	1065	4140	4340	300	400	17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ Good ⊙ Best

