



List 8730

A BRAND AE-TL-N



SPEED FEED
1353

CARBIDE

DLC

3 FLUTE

41°




SHRINK
FIT

REG

LONG



PACKED
1 PIECE

Cutting Diameter Tolerance	
3mm ≤ D ≤ 12mm	+0 / -0.020mm



EDP Number	Diameter	Length of Cut	Overall Length	Shank Diameter	Type	
						D (mm)
8557340	●	3.00	9.00	55.00	6.00	1
8557350	●	3.00	15.00	55.00	6.00	1
8557341	●	4.00	12.00	55.00	6.00	1
8557351	●	4.00	20.00	60.00	6.00	1
8557342	●	5.00	15.00	55.00	6.00	1
8557352	●	5.00	25.00	65.00	6.00	1
8557343	●	6.00	18.00	60.00	6.00	2
8557353	●	6.00	30.00	75.00	6.00	2
8557344	●	8.00	24.00	70.00	8.00	2
8557354	●	8.00	40.00	90.00	8.00	2
8557345	●	10.00	30.00	75.00	10.00	2
8557355	●	10.00	50.00	100.00	10.00	2
8557346	●	12.00	36.00	80.00	12.00	2
8557356	●	12.00	60.00	110.00	12.00	2

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

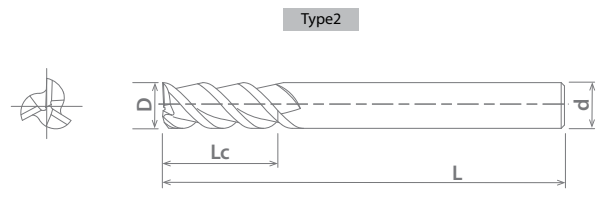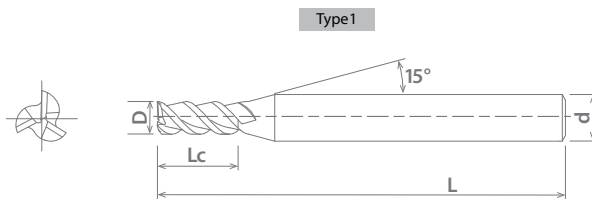

P					M			K	N		S		H						
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel						
Carbon Steel			Alloy Steel	Die Steel	300	400	17-4 PH		Aluminum		Nickel Alloy	Titanium							
Low	Medium	High							6061	7075			Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1045	1065	4140	4340														
1018	1045	1065							○	○									

○ Good ⊙ Best

