



A Brand AE-VTS-N

Advanced Performance DLC Coated End Mills for Non-Ferrous Materials

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

List 8830

A BRAND AE-VTS-N, Reduced Neck



NEW

SPEED FEED
1351-1352

CARBIDE

DLC-IGUSS

3 FLUTE

40-43°




SHRINK FIT

REG

PACKED
1 PIECE

Cutting Diameter Tolerance

1/8" ≤ D ≤ 1/2" +0 / -0.0008"

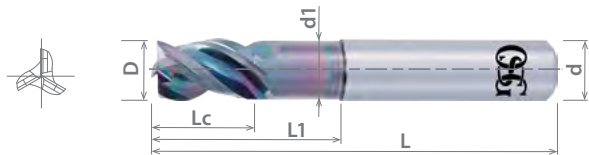

EDP Number		Diameter		Length of Cut		Neck Length	Neck Diameter	Overall Length	Shank Diameter
		D (Fractional Size)	Lc (Inch)	L1 (Inch)	d1 (Inch)	L (Inch)	d (Inch)		
88300009	●	1/8	0.250	0.375	0.120	2.250	0.125		
88300109	●	3/16	0.375	0.563	0.181	2.250	0.188		
88300209	●	1/4	0.500	0.750	0.242	2.500	0.250		
88300309	●	5/16	0.750	0.938	0.305	3.000	0.313		
88300409	●	3/8	0.875	1.125	0.367	3.000	0.375		
88300509	●	1/2	1.125	1.500	0.488	3.250	0.500		

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium								
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1010	1035	1065	4140	4340	300	400	17-4 PH										
1018	1045								○	○							

○ Good ○ Best

