



List 8930

A BRAND AE-VTS-N, Reduced Neck



NEW

SPEED FEED
1351-1352

CARBIDE

DLC-IGUSS

3 FLUTE

40-43°




SHRINK FIT

STUB


PACKED
1 PIECE

Cutting Diameter Tolerance	
1mm ≤ D ≤ 12mm	+0 / -0.020mm

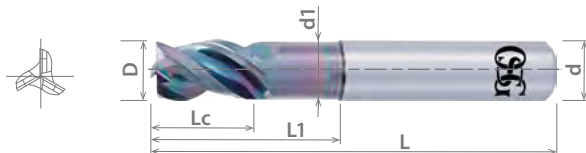

EDP Number	Diameter	Length of Cut	Neck Length	Neck Diameter	Overall Length	Shank Diameter	Type	
								D (mm)
8557243	●	1.00	1.50	3.00	0.95	45.00	4.00	1
8557244	●	1.50	2.30	4.50	1.45	45.00	4.00	1
8557245	●	2.00	3.00	6.00	1.95	45.00	4.00	1
8557246	●	2.50	3.80	7.50	2.40	45.00	4.00	1
8557360	●	3.00	4.50	9.00	2.85	55.00	6.00	1
8557361	●	4.00	6.00	12.00	3.80	55.00	6.00	1
8557362	●	5.00	7.50	15.00	4.80	55.00	6.00	1
8557363	●	6.00	9.00	18.00	5.80	60.00	6.00	2
8557364	●	8.00	12.00	24.00	7.70	70.00	8.00	2
8557365	●	10.00	15.00	30.00	9.70	75.00	10.00	2
8557366	●	12.00	18.00	36.00	11.70	80.00	12.00	2

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

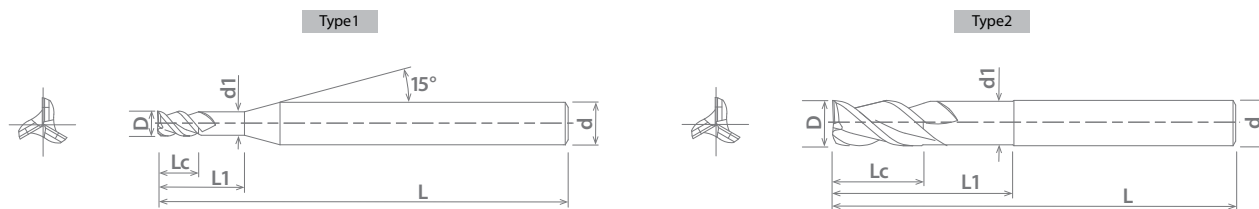

P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium					
Low	Medium	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1010	1035	1065	4140	4340				○	○								
1018	1045																

○ Good ○ Best

