

List 9510

EXOPRO® PHX-DBT, Deep Feed


SPEED FEED 1473-1474	CARBIDE	EXO®	3 FLUTE	45°		SHANK h6	STUB	PACKED 1 PIECE
--------------------------------	----------------	-------------	----------------	------------	--	--------------------	-------------	--------------------------

Radius Tolerance	
1mm ≤ D ≤ 20mm	+/- 0.010mm



EDP Number		Diameter		Length of Cut		Overall Length		Shank Diameter		Type
		D (mm)		Lc (mm)		L (mm)		d (mm)		
3090202	●	1.00		1.50		60.00		6.00		1
3090204	●	2.00		3.00		60.00		6.00		1
3090206	●	3.00		4.50		70.00		6.00		1
3090208	●	4.00		6.00		70.00		6.00		1
3090210	●	5.00		7.50		70.00		6.00		1
3090212	●	6.00		9.00		80.00		6.00		2
3090312	●	6.00		9.00		110.00		6.00		2
3090216	●	8.00		12.00		90.00		8.00		2
3090316	●	8.00		12.00		120.00		8.00		2
3090220	●	10.00		15.00		100.00		10.00		2
3090320	●	10.00		15.00		130.00		10.00		2
3090222	●	12.00		18.00		100.00		12.00		2
3090322	●	12.00		18.00		140.00		12.00		2
3090226	●	16.00		24.00		150.00		16.00		2
3090230	●	20.00		30.00		150.00		20.00		2
3090330	●	20.00		30.00		200.00		20.00		2

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

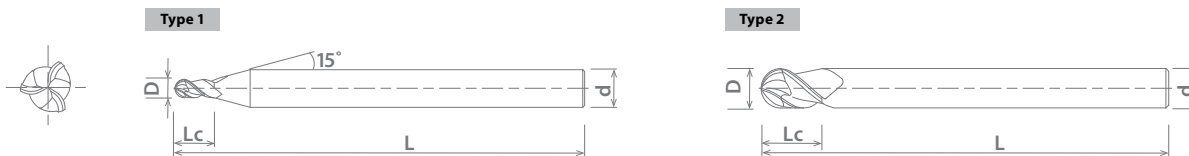

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum	Nickel Alloy	Titanium					
Low	Medium	High			6061	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC			
1010	1035	1065	4140	4340	300	400	17-4 PH					○	○	○	○	○
○	○	○	○	○	○	○	○	○				○	○	○	○	○

○ Good ○ Best



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX