





List 9906

PACKED
1 PIECE

HY-PRO® Shrink Flush Extensions, For Coolant-Through the Collet Operations

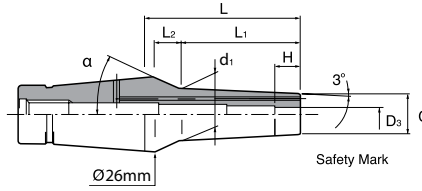

EDP Number	Designation	Body Type	Bore Diameter	Nose Diameter	Neck Length		Neck Diameter	Overall Length	Taper Angle	Clamping Length	Max Insertion Length
			d3 (Inch)	C (Inch)	L1 (Inch)	L2 (Inch)	d1 (Inch)	L (Inch)	α (°)	H (Inch)	H1 (Inch)
9910051	● CF12-1/8-55	Flush	0.125	0.380	1.650	0.370	0.550	2.170	32.4	0.390	3.350
9910054	● CF12-3/16-55	Flush	0.188	0.500	1.650	0.370	0.680	2.170	24.7	0.590	3.350
9910057	● CF12-1/4-55	Flush	0.250	0.560	1.650	0.370	0.740	2.170	20.7	0.710	3.350
9910060	● CF12-5/16-55	Flush	0.313	0.630	1.650	0.370	0.800	2.170	16.6	0.980	3.350
9910063	● CF12-3/8-55	Flush	0.375	0.690	1.650	0.370	0.860	2.170	12.2	1.180	2.360
9910068	● CF12-7/16-55	Flush	0.438	0.750	1.650	0.370	0.930	2.170	6.9	1.180	2.360
9910066	● CF12-1/2-55	Flush	0.500	0.810	1.990	-	-	2.170	-	1.180	2.360

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked
 The tool should be inserted deeper than the safety mark.
 The collet cannot be customized.
 Do not exceed the Max Insertion Length.



EDP Number	Designation	Body Type	Bore Diameter	Nose Diameter	Neck Length		Neck Diameter	Overall Length	Taper Angle	Clamping Length	Max Insertion Length
			d3 (mm)	C (mm)	L1 (mm)	L2 (mm)	d1 (mm)	L (mm)	α (°)	H (mm)	H1 (mm)
8910050	● CF12-3-35	Flush	3.0	9.5	22.0	9.5	11.9	35.0	44.4	10.0	60.0
8910051	● CF12-3-55	Flush	3.0	9.5	42.0	9.5	14.0	55.0	38.7	10.0	80.0
8910052	● CF12-3-80	Flush	3.0	9.5	67.0	9.5	16.6	80.0	30.7	10.0	105.0
8910053	● CF12-4-35	Flush	4.0	12.0	22.0	9.5	14.4	35.0	37.5	12.0	60.0
8910054	● CF12-4-55	Flush	4.0	12.0	42.0	9.5	16.5	55.0	31.1	12.0	80.0
8910055	● CF12-4-80	Flush	4.0	12.0	67.0	9.5	19.1	80.0	22.6	12.0	105.0
8910056	● CF12-6-35	Flush	6.0	14.0	22.0	9.5	16.4	35.0	31.4	18.0	60.0
8910057	● CF12-6-55	Flush	6.0	14.0	42.0	9.5	18.5	55.0	24.6	18.0	80.0
8910058	● CF12-6-80	Flush	6.0	14.0	67.0	9.5	21.1	80.0	16.0	18.0	105.0
8910059	● CF12-8-35	Flush	8.0	16.0	22.0	9.5	18.4	35.0	25.0	25.0	60.0
8910060	● CF12-8-55	Flush	8.0	16.0	42.0	9.5	20.5	55.0	18.0	25.0	80.0
8910061	● CF12-8-80	Flush	8.0	16.0	67.0	9.5	23.1	80.0	9.4	25.0	105.0
8910062	● CF12-10-35	Flush	10.0	18.0	22.0	9.5	20.4	35.0	18.3	30.0	60.0
8910063	● CF12-10-55	Flush	10.0	18.0	42.0	9.5	22.5	55.0	11.4	30.0	60.0
8910064	● CF12-10-80	Flush	10.0	18.0	-	-	-	80.0	-	30.0	60.0
8910065	● CF12-12-35	Flush	12.0	20.0	22.0	9.5	22.4	35.0	11.7	30.0	60.0
8910066	● CF12-12-55	Flush	12.0	20.0	42.0	9.5	24.5	55.0	5.0	30.0	60.0
8910067	● CF12-12-80	Flush	12.0	20.0	-	-	-	80.0	-	30.0	60.0

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked
 The tool should be inserted deeper than the safety mark.
 The collet cannot be customized.
 Do not exceed the Max Insertion Length.

